



FEATURES

- Universal 85 - 277VAC or 120 - 390VDC Input voltage
- Wide adjustable output voltage range
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +85°C
- High efficiency, high reliability
- Active PFC
- High I/O isolation test voltage up to 4000VAC
- Supports 7+1 parallel redundancy
- Supports PMBus communication
- Output short circuit, over-current, over-voltage, over-temperature protection
- 5 years warranty
- Operating altitude up to 5000m
- Design refer to IEC62368, UL60601, GB4943

LMF3000-20Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/EN/UL/BS EN62368, UL60601, GB4943, standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, medical, smart home etc.

Selection Guide

| Certification | Part No. | Output Power (W) | Nominal Output Voltage and Current (Vo/Io) | | Adjustable Range of Output Voltage Vo1(V) | | Efficiency 230VAC (%) Typ. | Maximum Capacitive Load at normal temperature (µF) | |
|---------------|---------------|------------------|--|----------|---|--------|----------------------------|--|-----|
| | | | Vo1/Io1 | Vo2/Io2 | ADJ | Vprog | | Vo1 | Vo2 |
| EN | LMF3000-20B12 | 2410 | 12V/200A | 12V/0.8A | 9-15 | 2.4-15 | 90 | 32000 | 470 |
| | LMF3000-20B24 | 3010 | 24V/125A | 12V/0.8A | 18-30 | 4.8-30 | 92 | 20000 | 470 |
| | LMF3000-20B48 | 3010 | 48V/62.5A | 12V/0.8A | 36-60 | 9.6-60 | 93 | 10000 | 470 |

Input Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------|---|-------------------------------|-----------|------|------|
| Input Voltage Range | Rated input (Certified voltage) | 100 | -- | 240 | VAC |
| | AC input | 85 | -- | 277 | |
| | DC input | 120 | -- | 390 | VDC |
| Input Voltage Frequency | Rated input (Certified voltage) | 47 | -- | 63 | Hz |
| | AC input | 47 | -- | 63 | |
| Input Current | Rated input (Certified voltage) | -- | -- | 20 | A |
| | 115VAC | -- | -- | 16.5 | |
| | 230VAC | -- | -- | 17.5 | |
| Inrush Current | 115VAC | Cold start | -- | 20 | -- |
| | 230VAC | | -- | 40 | -- |
| Power Factor | 115VAC | Normal temperature, full load | PF ≥ 0.99 | | |
| | 230VAC | | PF ≥ 0.95 | | |
| Start-up Delay Time | 115VAC/230VAC, normal temperature, rated load | -- | -- | 3 | s |
| Input Fuse* | Built-in fuse | -- | 25 | -- | A |
| Input Under-voltage Protection | Under-voltage protection start (Input voltage drops from high to low) | 60 | -- | -- | VAC |
| | Under-voltage protection release (Input voltage rises from low to high) | -- | -- | 85 | |
| Hot Plug | | Unavailable | | | |

Note: *If the fuse is, or could be, in the neutral of the mains supply, the mains shall be disconnected to de-energize the phase conductors.

Output Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-----------------------------|---------------------------|-------------------------------------|---|-------|------|------|
| Output Voltage Accuracy | Full load range | | -- | ±1 | -- | % |
| Line Regulation | Rated load | | -- | ±0.5 | -- | |
| Load Regulation | 0% - 100% load | | -- | ±0.5 | -- | |
| Minimum Load | | | 0 | -- | -- | |
| Ripple & Noise* | Vo1 | 12V/24V | -- | -- | 150 | mV |
| | | 48V | -- | -- | 250 | |
| | Vo2 | | -- | -- | 100 | |
| Temperature Coefficient | | | -- | ±0.03 | -- | %/°C |
| Hold-up Time | 115VAC/230VAC, rated load | | -- | 14 | -- | ms |
| Short Circuit Protection | | | Long-term constant current without triggering over-temperature protection, self-recover after the short-circuit state is canceled | | | |
| Over-current Protection | | | Enter the constant current state, self-recover after the over-current state is canceled | | | |
| Over-voltage Protection | 12V | | ≤25VDC (Output voltage turn off, re-power on for recover) | | | |
| | 24V | | ≤35VDC (Output voltage turn off, re-power on for recover) | | | |
| | 48V | | ≤70VDC (Output voltage turn off, re-power on for recover) | | | |
| Over-temperature Protection | 230VAC, 100% load | Over-temperature protection start | -- | -- | 65 | °C |
| | | Over-temperature protection release | 50 | -- | -- | |

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47μF electrolytic capacitor and 0.1μF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

General Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit | |
|-----------------------|--------------------------------|--|------------------------------|------|------|-------|--------|
| Isolation Test | Input - ⊕ | Electric strength test for 1min., leakage current <10mA | 2000 | -- | -- | VAC | |
| | Input - output | | 4000 | -- | -- | | |
| | Output - ⊕ | | 1500 | -- | -- | | |
| Insulation Resistance | Input - ⊕ | Ambient temperature: 25 ± 5°C Relative humidity: < 95%RH, no condensation Test voltage: 500VDC | 100 | -- | -- | MΩ | |
| | Input - output | | 100 | -- | -- | | |
| | Output - ⊕ | | 100 | -- | -- | | |
| Isolation level | Input - output | | 2 x MOPP | | | | |
| | Input - ⊕ | | 1 x MOPP | | | | |
| | Output - ⊕ | | 1 x MOPP | | | | |
| Operating Temperature | | | -40 | -- | 85 | °C | |
| Storage Temperature | | | -40 | -- | 85 | | |
| Operating Humidity | Non-condensing | | 10 | -- | 95 | %RH | |
| Storage Humidity | | | 20 | -- | 90 | | |
| Switching Frequency | PFC | | -- | 65 | -- | KHz | |
| | DC- DC | | -- | 82 | -- | | |
| | Auxiliary source | | -- | 65 | -- | | |
| Power Derating | Operating temperature derating | | -40°C to +50°C | | 0 | -- | % / °C |
| | | | +50°C to +85°C | | 2.5 | -- | |
| | Input voltage derating | AC Input (12V) | 85VAC-90VAC (Based on 1500W) | | 6 | -- | %/VAC |
| | | | 90VAC-180VAC | | 1500 | | W |
| | | | 180VAC-277VAC | | 2400 | | |
| | DC Input | 120VDC-180VDC | | 1.25 | -- | %/VAC | |

| | | | | | | | |
|------------------|----------------------------|---|--------------------------------|------|----|----|-------|
| | (12V) | (Based on 1500W) | | | | | |
| | | 180VDC-350VDC | 1500 | | | W | |
| | | 350VDC-390VDC | 2400 | | | | |
| | Input voltage derating | AC Input (24V/48V) | 85VAC-90VAC (Based on 1500W) | 6 | -- | -- | %/VAC |
| | | | 90VAC-180VAC | 1500 | | | W |
| | | 180VAC-277VAC | 3000 | | | | |
| | | DC Input (24V/48V) | 120VDC-180VDC (Based on 1500W) | 1.25 | -- | -- | %/VAC |
| 180VDC-350VDC | 1500 | | | W | | | |
| 350VDC-390VDC | 3000 | | | | | | |
| Leakage Current | 240VAC, 60Hz | Touch current | <0.1mA | | | | |
| | | Earth leakage current | <0.5mA | | | | |
| Safety Standards | 12V/24V/48V | EN/BS EN62368-1 Design refer to UL62368-1, IEC62368-1, UL60601-1, GB4943.1 | | | | | |
| Safety Class | | CLASS I | | | | | |
| MTBF | MIL-HDBK-217F@25°C | ≥250,000 h | | | | | |
| Warranty | Ambient temperature: ≤85°C | 5 years | | | | | |

General Specifications

| | |
|----------------|-------------------------------|
| Case Material | Metal (SUS 304) |
| Dimensions | 279.40mm x 177.80mm x 63.50mm |
| Weight | 3400g (Typ.) |
| Cooling Method | Forced cooling 26.63 CFM |

Electromagnetic Compatibility (EMC)

| | | | | |
|-----------|------------------|------------------|--|---------------------|
| Emissions | CE | CISPR32 EN55011 | 150kHz—30MHz | CLASS A |
| | RE | CISPR32 EN55011 | 30MHz—1GHz | CLASS A |
| | Harmonic current | IEC/EN61000-3-2 | | CLASS A and CLASS D |
| Immunity* | ESD | IEC/EN61000-4-2 | Contact ±8KV/Air ±15KV | Perf. Criteria A |
| | RS | IEC/EN61000-4-3 | 80MHz - 1GHz 10V/m | |
| | EFT | IEC/EN61000-4-4 | ±4KV, (5 or 100)kHz | |
| | Surge | IEC/EN61000-4-5 | line to line ±2KV/line to ground ±4KV | |
| | MS | IEC/EN61000-4-8 | 30A/m | |
| | CS | IEC/EN61000-4-6 | 0.15MHz - 80MHz 10Vr.m.s | |
| | Voltage dips | IEC/EN61000-4-11 | 70% U _n *, 25/30 periods (50/60Hz) 40% U _n *, 10/12 periods (50/60Hz) 0% U _n *, 1 periods | Perf. Criteria B |

Note: 1. *U_n is the maximum input nominal voltage.

2. *perf. Criteria:

A: The equipment shall continue to operate as intended without operator intervention;

B: After the test, the equipment shall continue to operate as intended without operator intervention;





C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

Functional Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit | |
|--------------------------|---|-----------|--|------|------|---|
| Remote Control Switch | All input voltage range, all load range | Power on | PS_ON /OFF(JP1300 Pin1) and SGND (JP1300 Pin2) are short | | | |
| | | Power off | PS_ON/OFF (JP1300 Pin1) and SGND (JP1300 Pin2) are open | | | |
| DC-OK Signal | All input voltage range, all load range | Power on | -- | 0 | 0.5 | V |
| | | Power off | 10 | -- | 12 | |
| Current Sharing Accuracy | Output >50%I _{o1} | -- | ±10 | -- | % | |



| | | | | | | |
|-------------------------------|--|------------------------------|--|-----|----|----|
| Remote Sense | The total compensated voltage value of Vs+ and Vs- (Pin12 and Pin18 of the JP1300) when they are shorted to both ends of the output load (Vs+ to +Vo, Vs- to -Vo) respectively | | -- | 200 | -- | mV |
| Oring | | | Support direct parallel use, achieve 7+1 parallel redundancy | | | |
| LED Signal | Main output status indication | Normal output | Green on | | | |
| | | Abnormal output, protected | Red on | | | |
| | | Power off (AC without Input) | Light off | | | |
| SDA, SCL for I ² C | | | Internal 2.4 k Ω pull-up resistor to internal 3.3V | | | |

Product Characteristic Curve

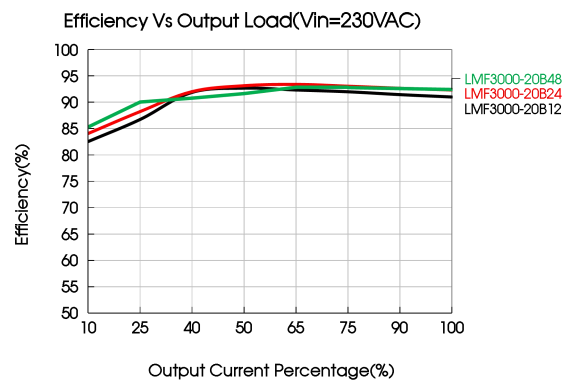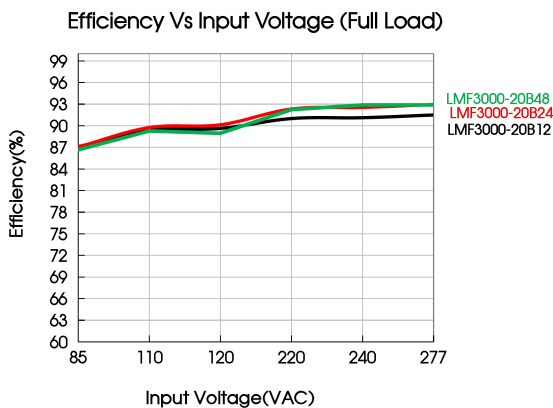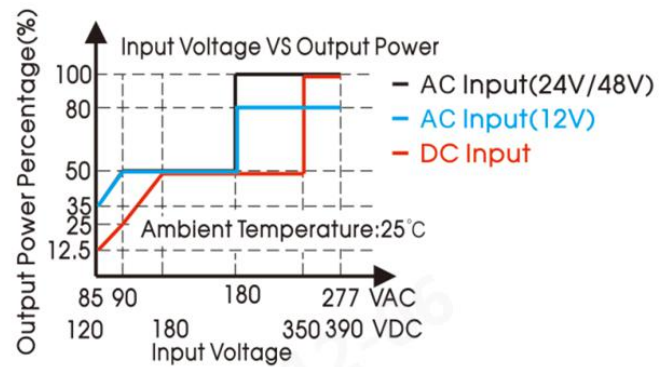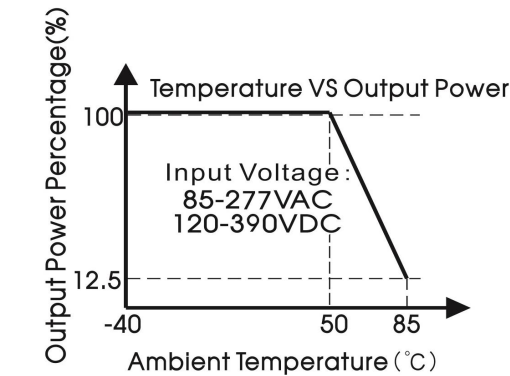

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

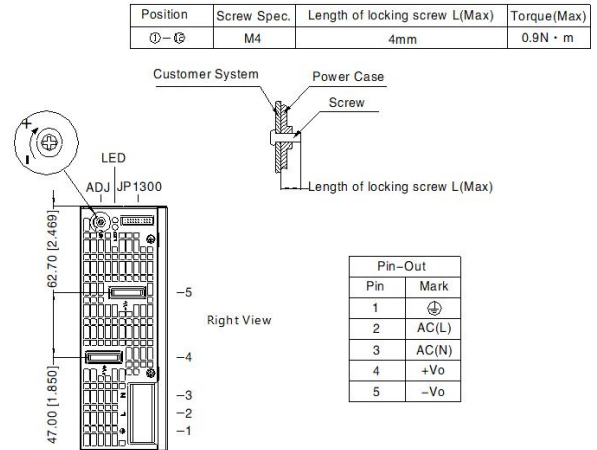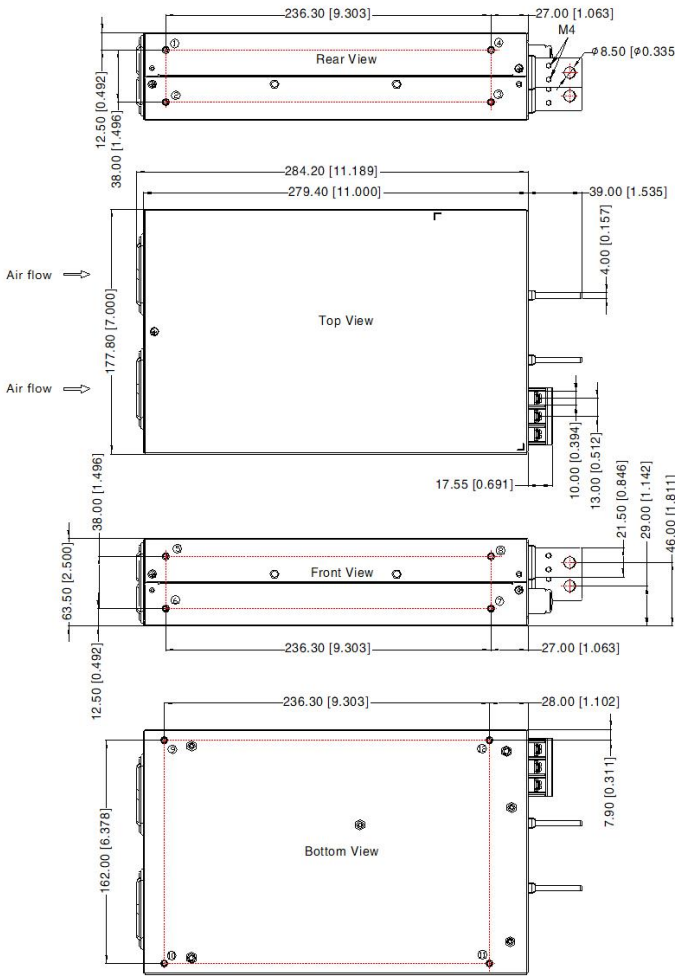

| JP1300 (Signal output) | | | | Customer Connector |
|------------------------|---------------|--------------------|-------|--|
| Pin-Out | | Customer Connector | | |
| Pin | Mark | Pin | Mark | Connector: JST PHDR-20VS or equivalent Terminal: JST SPHD-002T-P0.5 or equivalent |
| 1 | PS_ON/OFF | 2 | SGND | |
| 3 | AGND | 4 | AC_OK | |
| 5 | WP_EN | 6 | SGND | |
| 7 | +Vo2 | 8 | DC_OK | |
| 9 | +Vo2 | 10 | SGND | |
| 11 | SCL | 12 | VS+ | |
| 13 | SDA | 14 | VPROG | |
| 15 | Current share | 16 | A0 | |
| 17 | A1 | 18 | VS- | |
| 19 | A2 | 20 | AGND | |

| Connector wires range | | |
|-----------------------|----------------------------|-------------------------------------|
| Pro. No | Input connector (Pin1,2,3) | Output connector (Pin4,5) |
| 12V | 16-10AWG | 000AWG |
| 24V | | 2-000AWG |
| 48V | | 8-000AWG |
| Screw/torque | M4/Max 0.9N · m | M8/Max 13.5N · m M4/Max 0.9N · m |

Note:
 Unit: mm[inch]
 LED: Output status indicator LED
 ADJ: Output adjustable resistor
 General tolerances: ± 1.00[± 0.039]

- Note:
- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220625
 - Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity <75%RH with nominal input voltage and rated output load;
 - The room temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
 - All index testing methods in this datasheet are based on our company corporate standards;
 - In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
 - We can provide product customization service, please contact our technicians directly for specific information;
 - Products are related to laws and regulations: see "Features" and "EMC";
 - The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
 - The output voltage can be adjusted by the ADJ, clockwise to increase;
 - Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
 - The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China
 Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com

LMF3000-20Bxx Power Supply Application Note

Content

| | |
|--|----|
| 1. Overview description..... | 7 |
| 1.1 AC/DC input terminal block (J1)..... | 8 |
| 1.2 Main DC output terminal (+Vo, -Vo)..... | 8 |
| 1.3 Auxiliary DC output terminal (+Vo2: Pin7, 9; SGND: PIN2, 6, 10)..... | 9 |
| The auxiliary output terminal with a standard terminal of 2.0mm pitch..... | 9 |
| 1.4 Signal port (JP1300)..... | 9 |
| 1.5 Green and red status display LED lights..... | 10 |
| 1.6 Output voltage adjustment knob..... | 10 |
| 2. Function Manual..... | 12 |
| 2.1 Input requirements..... | 12 |
| 2.2 Output requirements..... | 12 |
| 2.3 Start-up timing..... | 12 |
| 2.4 Fan speed control..... | 13 |
| 2.5 Output over-voltage protection (OVP)..... | 13 |
| 2.6 Output constant-current protection (OCP)..... | 14 |
| 2.7 Output short circuit protection (SCP)..... | 14 |
| 2.8 Over-temperature protection (OTP)..... | 14 |
| 2.9 Output power derating..... | 14 |
| 2.10 Remote control..... | 15 |
| 2.11 DC_OK signal..... | 15 |
| 2.12 Remote compensation..... | 16 |
| 2.13 Parallel operation..... | 17 |
| 2.13.1 Redundancy..... | 17 |
| 2.13.2 Current sharing..... | 17 |
| 2.14 PMBus communication address..... | 19 |
| 3. Installation requirements..... | 20 |
| 3.1 Safety introduction..... | 20 |
| 3.2 Safety requirements..... | 20 |
| 3.3 Installation method..... | 20 |
| 4. Communication protocol..... | 22 |

1. Overview description

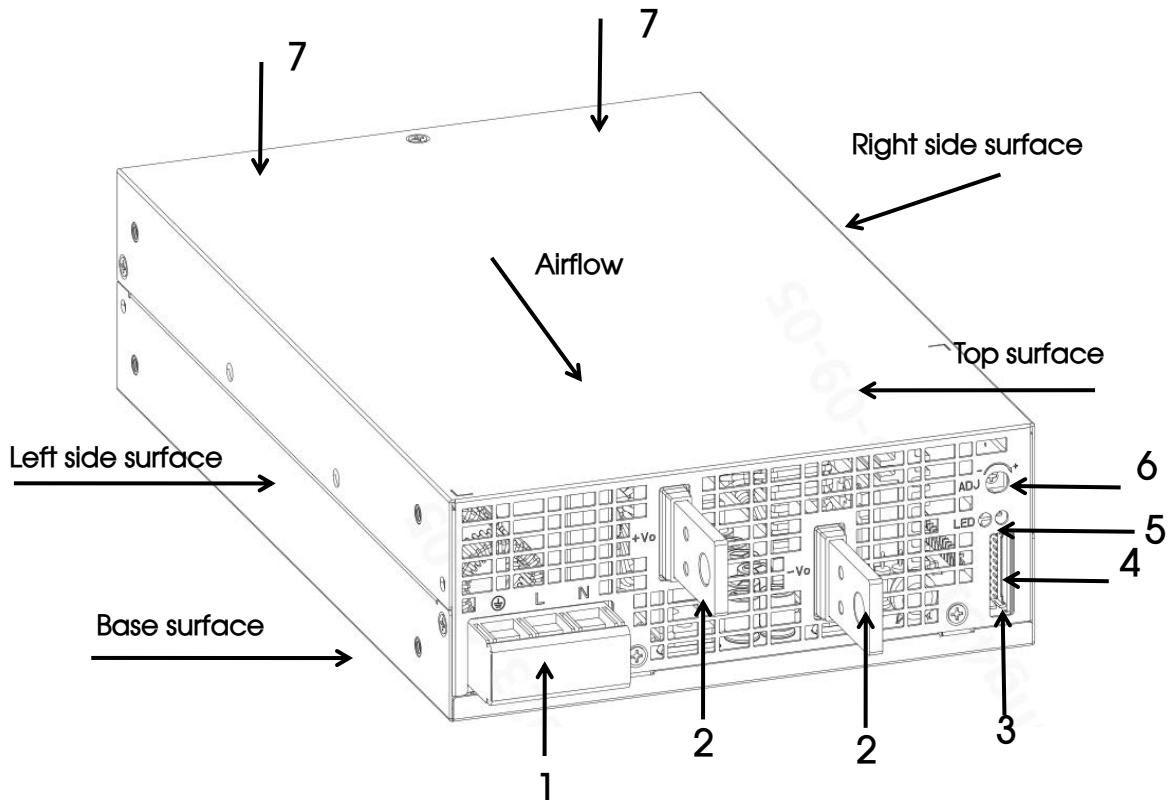



Fig. 1: Appearance information of LMF3000-20Bxx


Overview description:

1. AC/DC input terminal (J1)
2. DC main output terminal (+Vo, -Vo)
3. Auxiliary output terminal (JP1300 +Vo2: PIN7, 9; SGND: PIN2, 6, 10)
4. Signal connection press the terminal (JP1300)
5. Green and red status display LED lights
6. Output voltage regulation resistor
7. Fans

1.1 AC/DC input terminal block (J1)

The input terminal J1, as a standard 3-pin fence welding terminal with upper cover, the center spacing of the pins is 13mm.

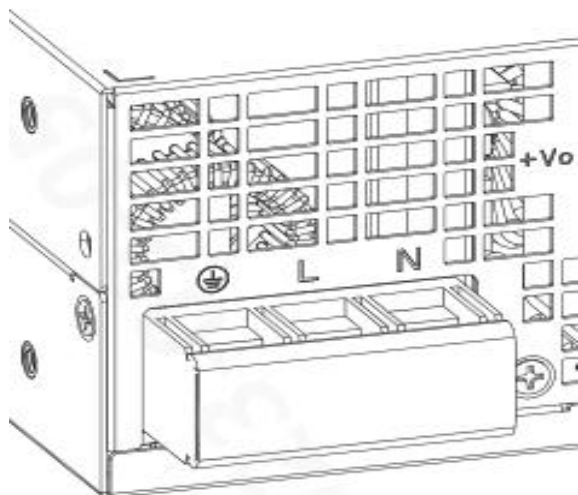


| Pin | Features |
|---|--------------|
| L | Line (Phase) |
| N | Neutral |
|  | Ground/Earth |

Wire size: 16-10AWG
Torque: M4/0.9N·m (max)

1.2 Main DC output terminal (+Vo, -Vo)

The output terminal uses two standard screw lock type metal terminals, the pin spacing between each is 45mm.

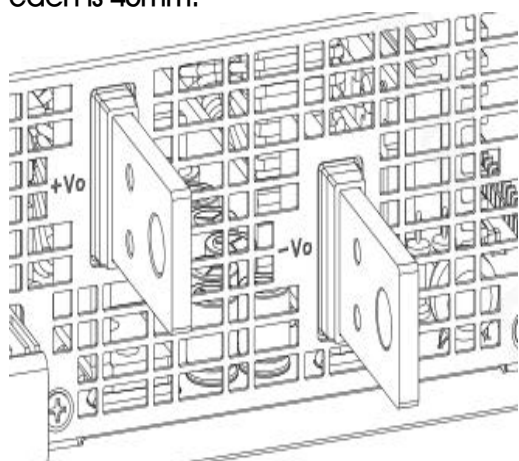


| Pin | Features |
|-----|---------------|
| +Vo | Main output + |
| -Vo | Main output - |

Torque: M8/13.5N·m (max)
M4/0.9N·m (max)


1.3 Auxiliary DC output terminal (+Vo2: Pin7, 9; SGND: PIN2, 6, 10)

The auxiliary output terminal with a standard terminal of 2.0mm pitch.

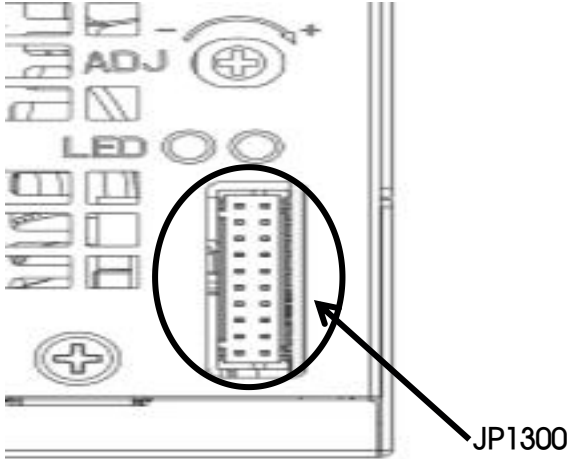

| Pin | Label | Function |
|-------------|-------|-----------------------|
| Pin7, 9 | +Vo2 | Auxiliary DC output + |
| PIN2, 6, 10 | SGND | Auxiliary DC output - |


1.4 Signal port (JP1300)

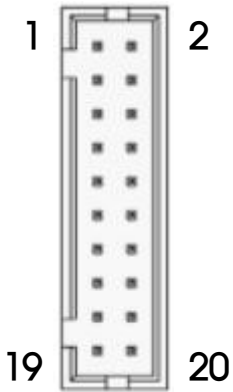

| Pin | Label | Features |
|-----|---------------|--|
| 1 | PS_ON/OFF | Remote control signal |
| 2 | SGND | AUX terminal reference ground |
| 3 | AGND | Signal terminal reference ground |
| 4 | AC_OK | AC_OK Signal |
| 5 | WP-EN | External storage enable signal |
| 6 | SGND | AUX terminal reference ground |
| 7 | +Vo2 | The auxiliary path outputs the positive terminal |
| 8 | DC_OK | DC_OK Signal |
| 9 | +Vo2 | The auxiliary path outputs the positive terminal |
| 10 | SGND | AUX terminal reference ground |
| 11 | SCL | I2C communication line |
| 12 | VS+ | Remote compensation positive terminal |
| 13 | SDA | I2C communication line |
| 14 | VPROG | The software output is adjustable |
| 15 | Current share | Current sharing bus |
| 16 | A0 | ADDRESS code 0 |
| 17 | A1 | ADDRESS code 1 |
| 18 | VS- | Remote compensation negative terminal |
| 19 | A2 | ADDRESS code 2 |
| 20 | AGND | Signal terminal reference ground |

Note: The reference ground of all pins on the signal terminal is Pin2, Pin6 and Pin10.

1.5 Green and red status display LED lights

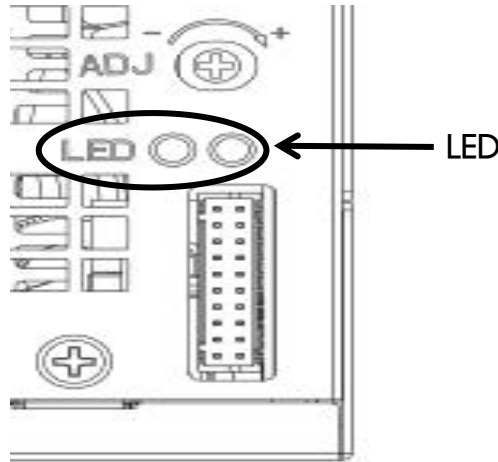


Two kinds of LED lights indicate difference working states of the power supply:

| Green LED | Red LED | Status |
|-----------|---------|-------------|
| ON | OFF | Normal work |
| OFF | ON | Main alarm |
| OFF | OFF | No input |

1.6 Output voltage adjustment knob

Turn counterclockwise to increase output voltage

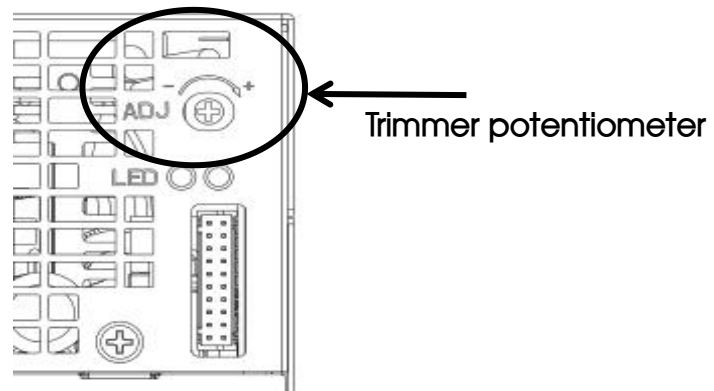

| Model | Rated Output Voltage | Adjustable Range Of Output Voltage |
|---------------|----------------------|------------------------------------|
| LMF3000-20B12 | 12V | 9-15V |
| LMF3000-20B24 | 24V | 18-30V |
| LMF3000-20B48 | 48V | 36-60V |

If you want wider output voltage regulation (beyond the range of adjustable resistance regulation), as shown in the table below, you can use the following two methods.

| Model | Rated Output Voltage | Adjustable Range Of Output Voltage |
|---------------|----------------------|------------------------------------|
| LMF3000-20B12 | 12V | 2.4-15V |
| LMF3000-20B24 | 24V | 4.8-30V |
| LMF3000-20B48 | 48V | 9.6-60V |

Method 1: PMBus regulation

The set output voltage is adjusted through PMBus host communication. When the given value of the upper computer is minimum and the adjustable resistance is adjusted to the minimum, corresponding to the minimum output voltage; When the given value of the upper computer is maximum and the adjustable resistance is adjusted to the maximum, corresponding to the highest output voltage.

For example, the selection of LMF3000-20B24, rated output 24Vdc, need to be adjusted to 4.8Vdc, and at the same time adjust the adjustable resistor counterclockwise voltage to the minimum, then the output voltage will become 4.8Vdc.

Method 2: Signal voltage regulation

Connect PIN14(VPROG) on the JP1300 terminal to 0V and adjust the adjustable resistance to the lowest output voltage. When PIN14(VPROG) is externally connected to 5V and the adjustable resistance is adjusted to the maximum, it corresponds to the highest output voltage.

For example, the selection of LMF3000-20B24, rated output 24Vdc, need to adjust to 4.8Vdc, the operation is as follows; the signal voltage to 0Vdc, and at the same time adjust the adjustable resistor to the minimum voltage counterclockwise, then the output will become 4.8Vdc.

2. Function Manual

2.1 Input requirements

The AC input voltage and DC input voltage must be within the defined voltage range (refer to data-sheet), otherwise the power supply may not work properly or even malfunction. The internal L and N line of the power module have been connected in series with a 300V 25A fuse. For better protection, it is recommended that customers use a circuit breaker not greater than 25A (Non-mandatory requirement).

2.2 Output requirements


Main output

At any voltage value, the maximum output current and power must not exceed the rated/specified value. The output current must not exceed the maximum output current value.

Auxiliary output

The auxiliary circuit supports a maximum current of 12V/0.8A.

2.3 Start-up timing

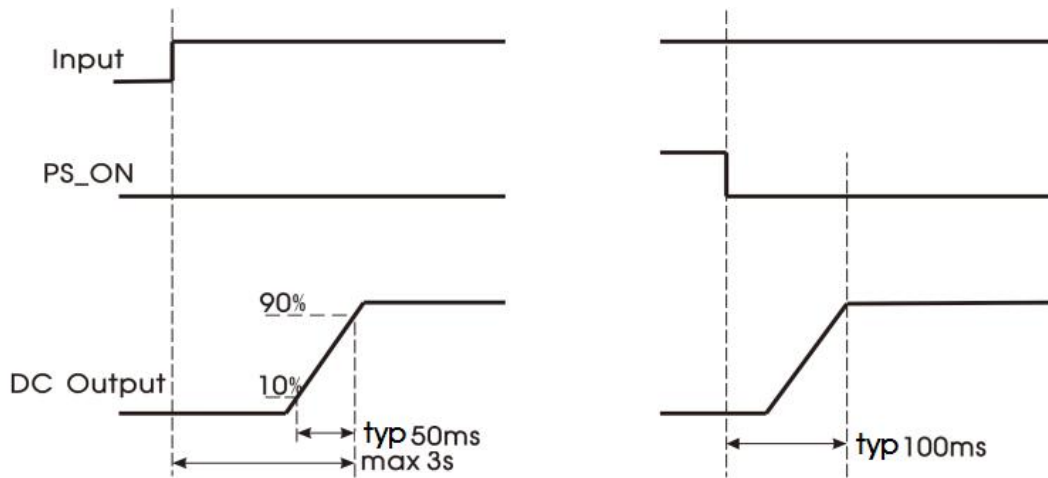

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|---------------------|--------------------------------|--------|------|------|------|------|
| Power-off Hold Time | Room temperature, full load | 115VAC | 14 | -- | -- | ms |
| | | 230VAC | 14 | -- | -- | |
| Start Delay Time | 230VAC, full load, 25°C | | -- | -- | 3 | s |

2.4 Fan speed control

Fan speed is determined by output power and output voltage at the same time, refer to the following curve for fan speed change.

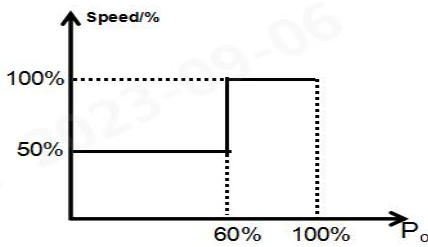


Fig.1

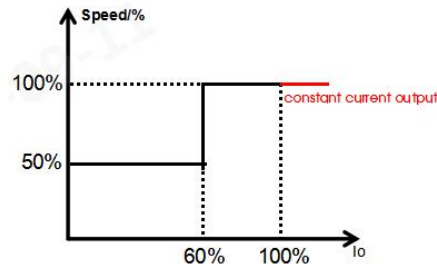



Fig.2

Po/Io: Rated output voltage


2.5 Output over-voltage protection (OVP)

Main output

The over-voltage protection function is to close the main output when the output voltage reaches the protection voltage value. When the main circuit over-voltage protection occurs, the main circuit output voltage of the module will be shut off, and the auxiliary circuit output will not be affected. The main circuit output can be restored after disconnecting the input power for at least 3 seconds.

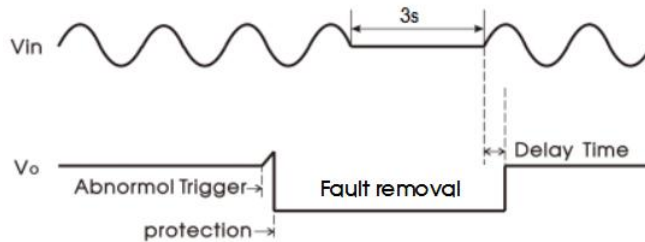

In addition, it can be quickly restarted by the PS_ON signal:

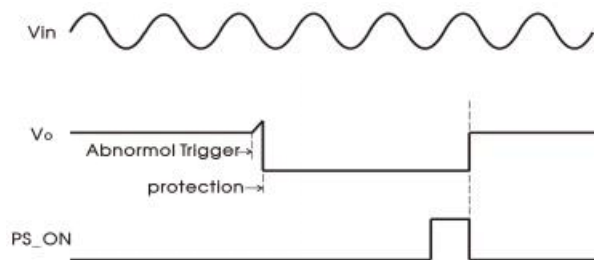

Auxiliary output

When the auxiliary circuit voltage reaches 16VDC (maximum value), the auxiliary output will be in hiccup status, and the main output voltage will be in hiccup status until the auxiliary output returns to normal after the fault is eliminated.

2.6 Output constant-current protection (OCP)

① Main circuit overcurrent

If in CC load mode, when the current exceeds the constant current point, the output enters CC mode; when the over current state is released, the output returns to normal.

If in CV/CR load mode, the relationship among output current, voltage and resistance is shown in the following curve:

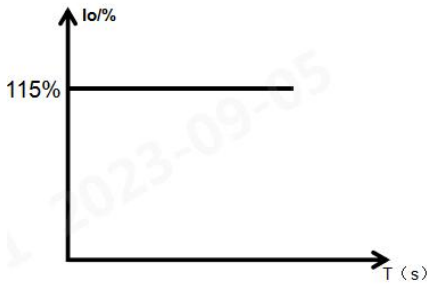


Fig.1

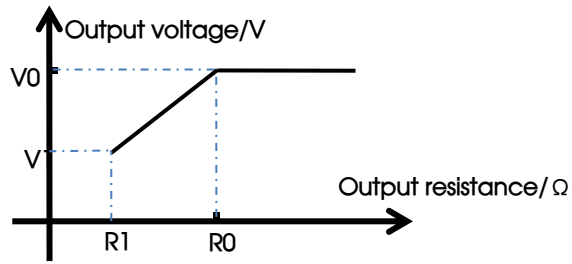


Fig.2

When the product enters the constant current state (The over-temperature protection is not triggered), the output state circulates as shown in Fig.1, until the constant current state is released. In Fig.2, the corresponding slope of segments R_1 - R_0 is the corresponding output current I when the current is constant.

② Auxiliary circuit overcurrent

When the auxiliary output current exceeds 130% (typ.) of the rated current, turn off the main output. After the overflows state is removed, the main route automatically recovers output after restart.

2.7 Output short circuit protection (SCP)

When the main output is short-circuited, the power output in CC mode (The over-temperature protection is not triggered). Fig.1 shows 2.6, after the short-circuit is removed, the power module will automatically return to normal, and the auxiliary output will not be affected.

When the auxiliary circuit output is short-circuited, the main circuit without output.

2.8 Over-temperature protection (OTP)


When the ambient temperature of the power supply exceeds the rated temperature for a period of time, the power supply will be turned off and the power supply will resume normal operation after the ambient temperature drops to the set value.

2.9 Output power derating


When the input voltage is greater than 180VAC (or 350VDC), only need to derate according to the

temperature derating curve.

When the input voltage is lower than 180VAC (or 350VDC), the output power will be derated according to the following input voltage derating curve after temperature derating.

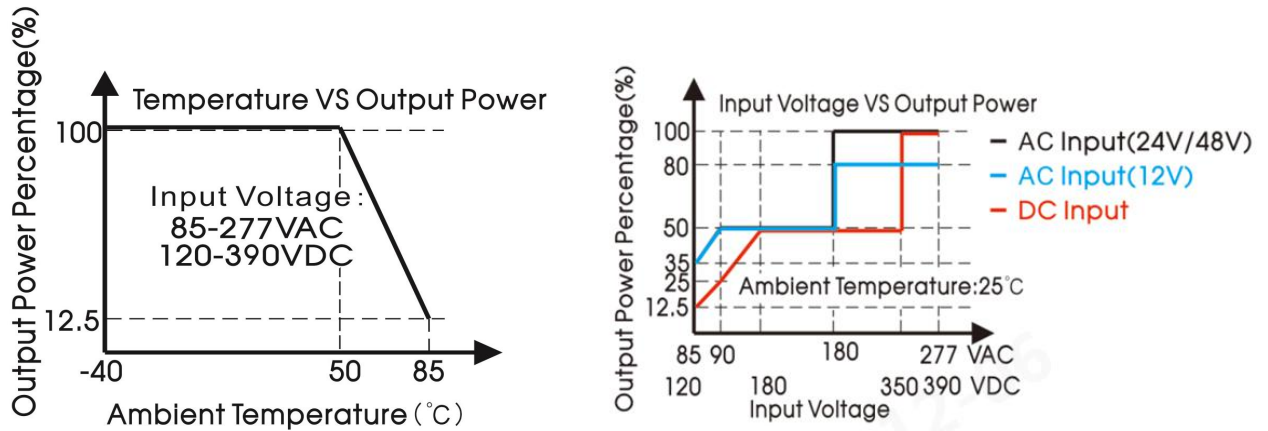

2.10 Remote control

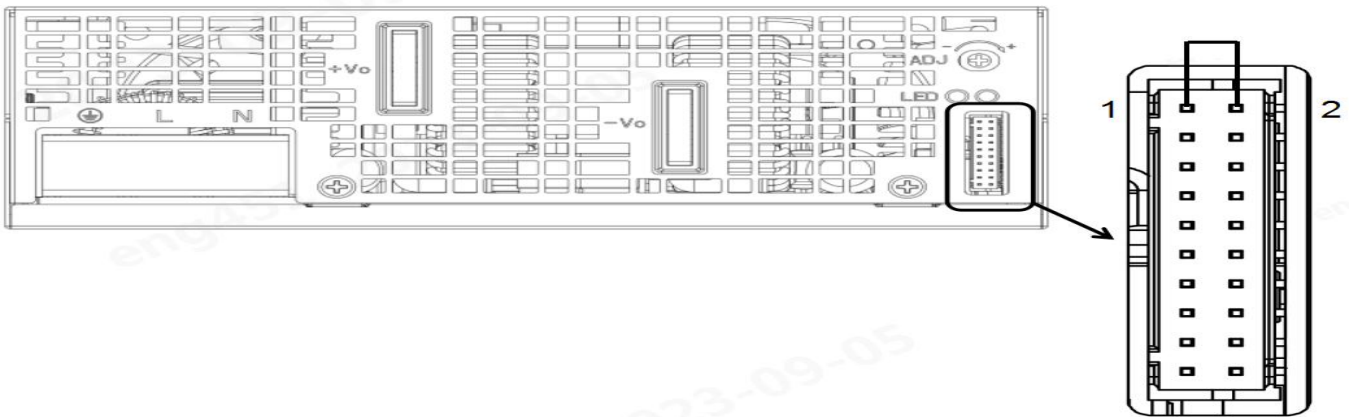

| | |
|---|---------------|
| Switch between PS_ON/OFF (Pin1) and SGND (Pin2) | Output Status |
| Short-Circuit | Output on |
| Pin floating | Output off |

If the input terminal of the power module has been connected to a power source, the PS_ON/OFF signal pin can be used to control the on and off of the main output, and the PS_ON/OFF signal does not affect the output voltage of the auxiliary circuit.



Note: The internal PS_ON/OFF input impedance of the module is 5.1K.

2.11 DC_OK signal

The DC_OK signal is used to monitor whether the power supply is working normally, and the signal is at Pin8 of the signal terminal JP1300.


Note: When the DC_OK signal is connected to the external circuit, the impedance of the external external

circuit (between Pin8 and Pin2, 6, 10 of JP1300) is not less than 10k Ω .

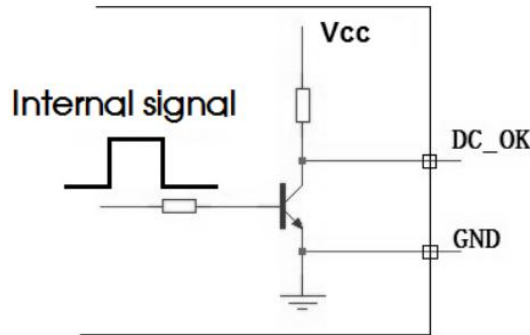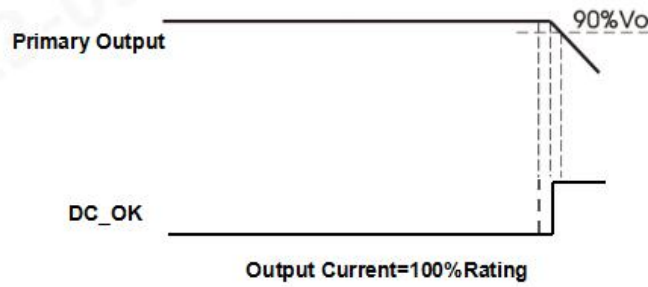

| DC_OK (Pin8) and SGND (Pin2, 6, 10) | Output State |
|-------------------------------------|--------------|
| 0 - 0.5V | Output on |
| 10 - 12V | Output off |

2.12 Remote compensation

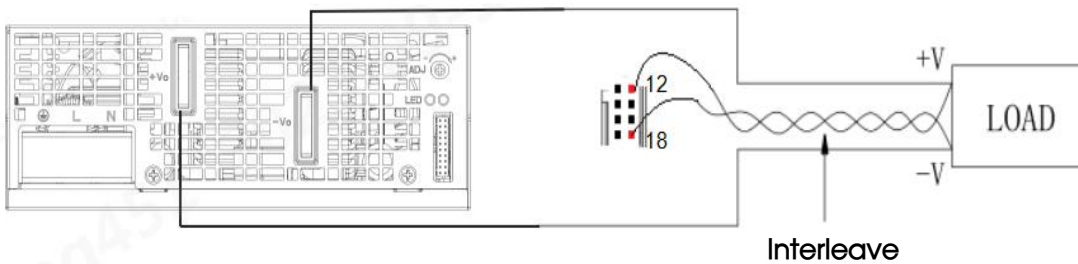

Note:

1. Vs+ and Vs- cannot be shorted or reversed, otherwise the power module will be damaged.
2. Before powering on the product, please confirm whether the control signal connection terminal (JP1300) Pin1 (PS_ON/OFF) and Pin2 (SGND) short-circuit jumper cap are connected. If not, the product without output. When the control signal connection terminal (JP1300) of the product are external connected as a whole, please ensure that Pin1 and Pin2 are short-circuit connected. Please refer to LMF3000-20Bxx Series Power Supply Application Notes: 2.10 Remote control.
3. Pin 12 and pin 18 of the signal terminal JP1300 can compensate the voltage drop on the output cable.

4. The remote compensation circuit can compensate 200mV cable voltage drop. This voltage includes the sum of the cable drop connected to the output positive terminal and the output negative terminal.

5. If you need to use the remote compensation function, the signal pin needs to be connected with the load end with a twisted pair cable.

2.13 Parallel operation

2.13.1 Redundancy


The power module output can be connected in parallel to achieve redundancy, thereby improving system reliability. The maximum power of the redundant system needs to be derated to ensure that the redundant system can still meet the rated load requirements when a power supply module fails. The current common practice is to construct a redundant system by the N+1 method, that is, N+1 power supplies are connected in parallel, to support the maximum load current $N \cdot I_{omax}$, where I_{omax} is the rated output current of each power supply. For example, the rated output current of each power supply is 40A, and 7+1 units are connected in parallel to construct a $7 \cdot 40A = 120A$ redundant system.

The power module supports 7+1 parallel redundant operation.

2.13.2 Current sharing


Method 1: Current sharing bus and remote compensation lines are both connected.

For load line loss $\leq 200mV$, and the output voltage difference of each single module $\leq 50mV$, this type of connection is recommended to obtain a better line-end output voltage and current sharing effect.

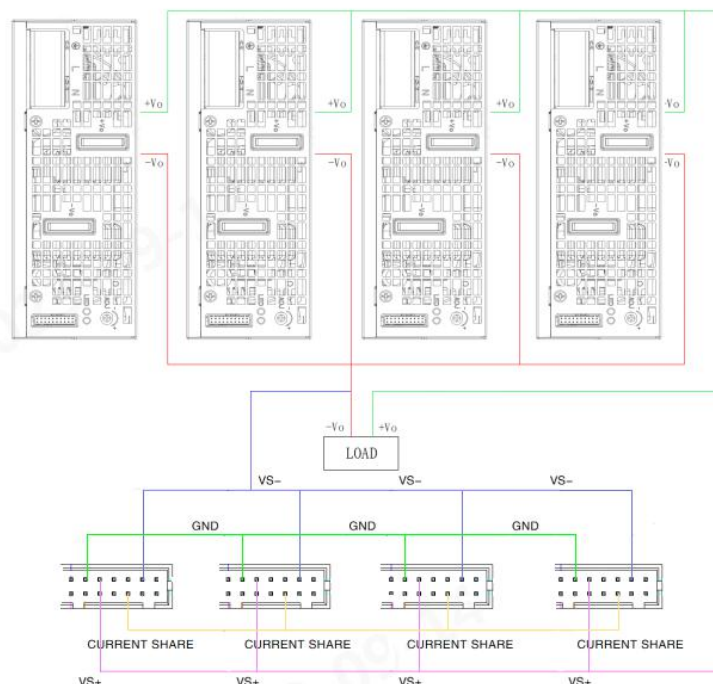

Method 2: Only the current sharing bus is connected, and the remote compensation is not connected.

For the load line loss $\geq 200\text{mV}$, or the output voltage difference of each single module cannot or does not need to be accurately adjusted to $\leq 50\text{mV}$, this type of connection is recommended to obtain a better current sharing effect of the parallel machine. In the same way, when the load loss is unknown or the current sharing fails to meet the specifications under the first connection method, it is recommended to replace it with this connected method. The wiring method of the current sharing function is shown in the figure below:

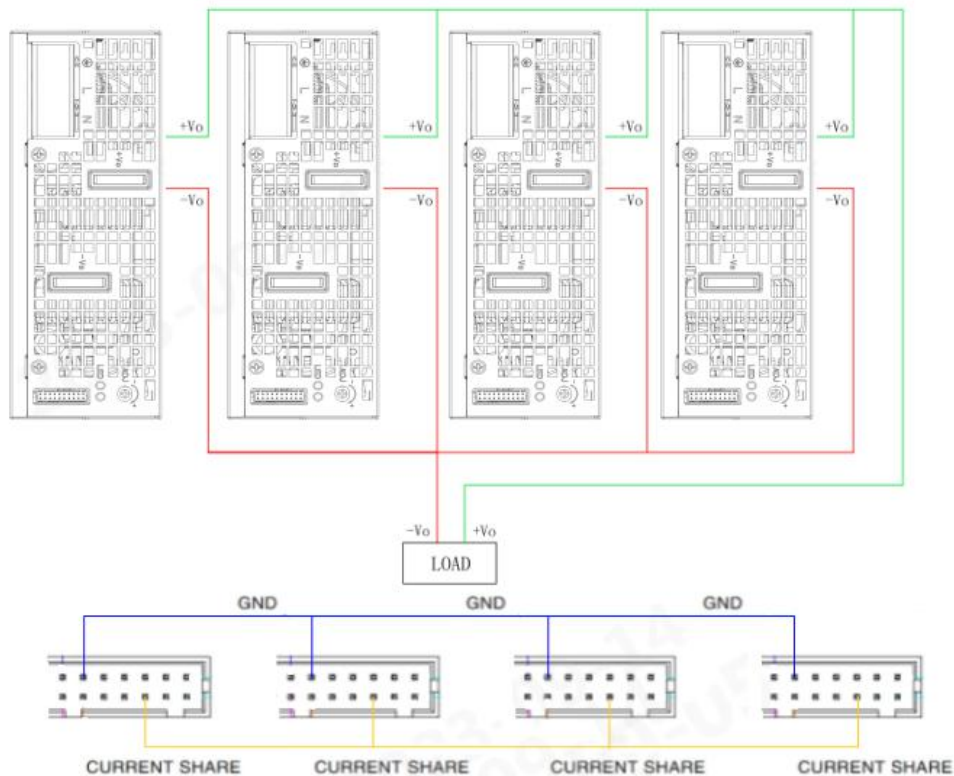

Note: 1. When using in parallel, the number of parallel modules cannot exceed 8.

2. Before powering on the product, please confirm whether the control signal connection terminal (JP1300) Pin1 (PS_ON/OFF) and Pin2 (SGND) short-circuit jumper cap are connected. If not, the product without output. When the control signal connection terminal (JP1300) of the product are external connected as a whole, please ensure that Pin1 and Pin2 are short-circuit connected. Please refer to LMF3000-20Bxx Series Power Supply Application Notes: 2.10 Remote control.

When power modules work in parallel, there is an internal active current sharing circuit to ensure that the current between each module is balanced.

The active current sharing circuit adopts the automatic master-slave current sharing method. Each power module has a current sharing bus signal (CURRENT SHARE BUS). When working in parallel, the current sharing bus of all power modules must be connected together. The current-sharing bus signal is located at pin 15 of JP1300.

The output voltage of each power module will affect the current sharing accuracy. The output voltage of the power module is the rated voltage $\pm 50\text{mV}$. In practical applications, if the output voltage value needs to be adjusted, the output voltage of all parallel power supply modules needs to be adjusted to the same voltage. The recommended voltage range: target voltage value $\pm 50\text{mV}$

After the output load of each power module is greater than 50% of the rated load, the current sharing accuracy should be $\pm 10\%$. The current sharing calculation formula is:

$$\text{Current sharing accuracy} = \frac{I_{o \max} - I_{o \min}}{I_{o \max}} * 100\%$$


$I_{o \max}$: the maximum output current value in parallel power supply modules.

$I_{o \min}$: the minimum output current value in parallel power supply modules.

2.14 PMBus communication address

In the parallel system, if you need to identify the power module information, you need to set the PMBus communication address for each parallel power module, and exchange data with the host computer through I2C. The setting of the communication address is determined by pins 16, 17 and 19 of the signal terminal JP1300. When these three pins are short-circuited with pin 3 or 20 of JP1300, it will be low level (L, voltage range: 0 - 1.31V). When disconnected, it is high level (H, voltage range: 1.99V - 3.3V). The specific address number is shown in the table below:

| ADDRESS 2 | ADDRESS 1 | ADDRESS 0 | Address number |
|-----------|-----------|-----------|----------------|
| L | L | L | 0 |
| L | L | H | 1 |
| L | H | L | 2 |
| L | H | H | 3 |
| H | L | L | 4 |
| H | L | H | 5 |
| H | H | L | 6 |
| H | H | H | 7 |

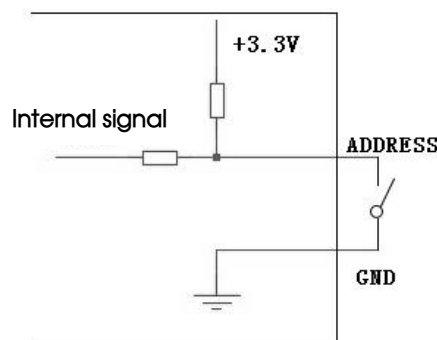

The internal pull-up resistance value of the power module is $10\text{k}\Omega$, and the external impedance can be matched according to the actual application to meet the high and low voltage range.

3. Installation requirements

3.1 Safety introduction

Warning: Risk of electric shock

During high voltage operating


- The power supply module is disconnected from the input DC or the AC power and placed for at least one minute before starting to operate it.
- When installing the input wire to the power module, please connect the ground terminal first, and then connect the L line and the N line.
- When removing the input wire, please remove the L wire and the N wire first, and then remove the ground wire.
- When disassembling, make sure that no objects fall into the power module.
- Pay attention to high temperature.
- After the power module is working in a high temperature environment, wait for its shell to cool down before operating.
- This product needs to be installed by professionals and needs to be used with other equipment.

3.2 Safety requirements

When installing, pay attention to the primary side and the protective ground, the creep distance and the electrical clearance of the primary side and the secondary side refer to EN60601-1.


3.3 Installation method

Standard mounting orientation:


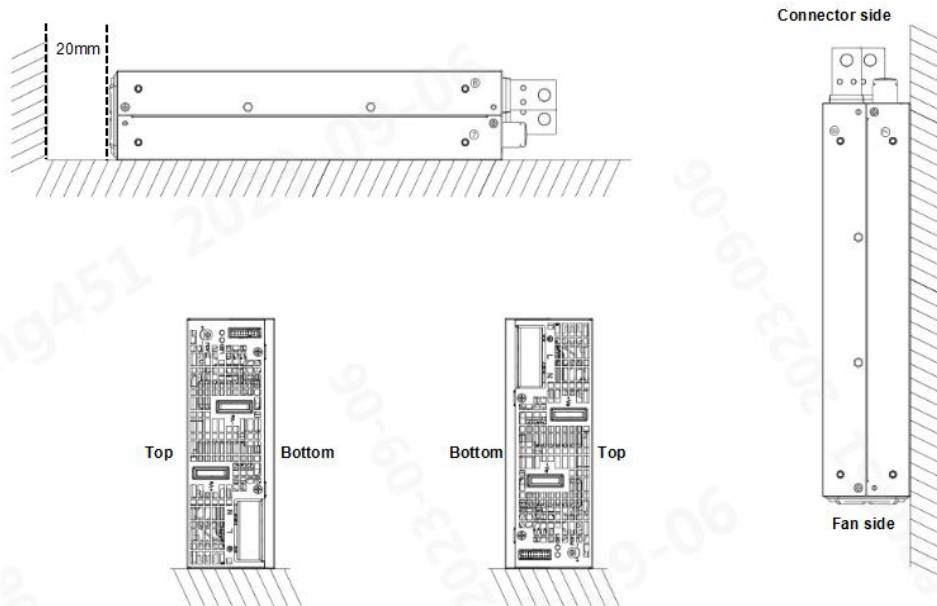


Position of mounting holes:

THIRD ANGLE PROJECTION

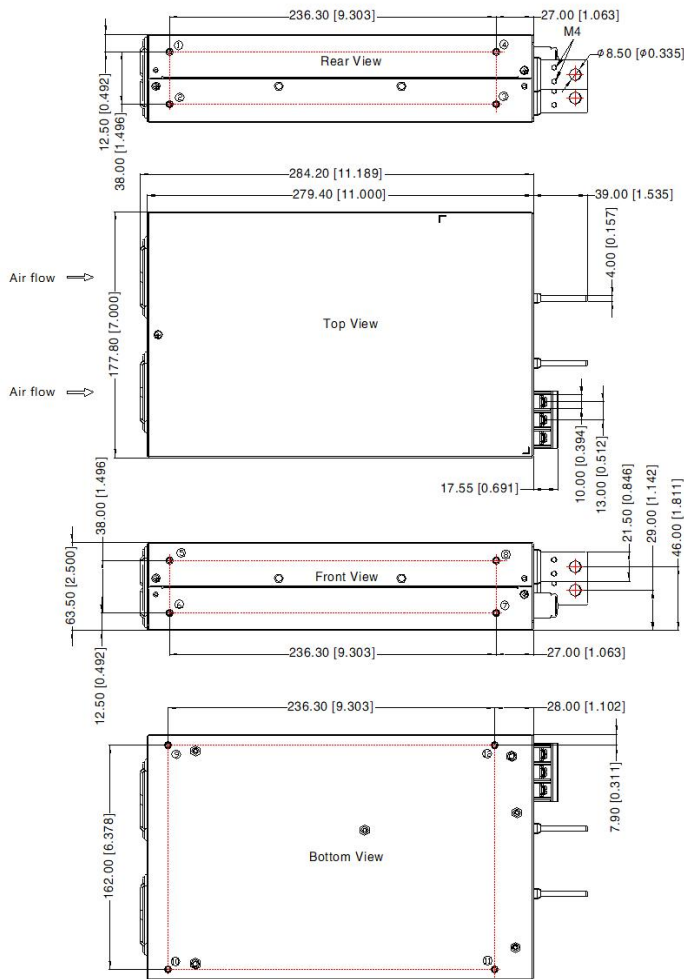

| Position | Screw Spec. | L(Max) | Torque(Max) |
|----------|-------------|--------|-------------|
| ①-③ | M4 | 4mm | 0.9N · m |

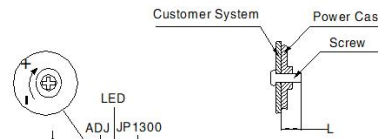

| Pin-Out | |
|---------|-------|
| Pin | Mark |
| 1 | AC(L) |
| 3 | AC(N) |
| 4 | +Vo |
| 5 | -Vo |

| JP1300 (Signal output) | | | | Customer Connector |
|------------------------|---------------|------|-------|--|
| Pin-Out | | Mark | | |
| 1 | PS_ON/OFF | 2 | SGND | Connector: JST PHDR-20VS or equivalent Terminal: JST SPHD-002T-P0.5 or equivalent |
| 3 | AGND | 4 | AC_OK | |
| 5 | WP_EN | 6 | SGND | |
| 7 | +Vo2 | 8 | DC_OK | |
| 9 | +Vo2 | 10 | SGND | |
| 11 | SCL | 12 | VS+ | |
| 13 | SDA | 14 | VPROG | |
| 15 | Current share | 16 | A0 | |
| 17 | A1 | 18 | VS- | |
| 19 | A2 | 20 | AGND | |

Connector wires range

| Pro. No | Input connector(Pin1,2,3) | Output connector(Pin4,5) |
|--------------|---------------------------|-------------------------------------|
| 12V | 16-10AWG | 000AWG |
| 24V | | 2-000AWG |
| 48V | | 8-000AWG |
| Screw/torque | M4/Max 0.9N · m | M8/Max 13.5N · m M4/Max 0.9N · m |

Note:
 Unit: mm[inch]
 LED: Output status indicator LED
 ADJ: Output adjustable resistor
 General tolerances: ± 1.00[± 0.039]

Note: The fan panel cannot be blocked by other objects, and a distance of at least 20mm must be maintained, otherwise it will affect the heat dissipation and performance of the power module.

4. Communication protocol

The LMF3000-20Bxx series power modules support standard PMBus communication protocols and manage and monitor the power modules through I2C bus.

| command | command name | Data read and write type | data byte | default | data layout | Command description |
|---------|----------------|--------------------------|-----------|---------|-------------|--|
| 00h | PAGE | Read Byte | 1 | 00h | | Reads the currently selected Page index number(0-Page0 corresponding main channel) |
| 01h | OPERATION | Read/Write Byte | 1 | 80h | | This command is used to remotely switch on and off the system. The alarm is cleared once when the system starts. 0x80: power on; 0x40: power off; |
| 02h | ON_OFF_CONFIG | Read/Write Byte | 1 | 1Ch | | Output The default value of the on-off control feature: 0x1D Bit4: 0-Is the power module powered on at any time regardless of the status of the control pin 1-The power module is not powered on before the pin control and command operation (set in bit 3:0)Bit3: 0-Ignore the CMD command word of the bus to start and stop the power module 1-According to the bus start command, the power module starts the output. According to the bit 2, the power module needs to set the control pin for the power module to start the output Bit2: 0-Power module ignore control pin (Power module switch is controlled only by CMD command) 1-The power module starts after the control pin is installed.According to bit 3, you need to run the command power module to start output. Bit1: 0-Active low level (start output with low power module) 1-Active high level (high power module to start output) Bit0: reserved |
| 03h | CLEAR_FAULTS | Send Byte | 0 | | N/A | This command is used to clear the current Page fault. After receiving this command, the existing fault alarms can be cleared. This command can only be cleared for all page faults |
| 10h | WRITE_PROTECT | Read/Write Byte | 1 | 80h | | This command is used to control write operations on the PMBus device 0x80: All write operations except the 10h command are prohibited 0x40: All write operations except 10h, 00h, and 01h commands are prohibited 00: Enables the write operation of all writable commands |
| 15h | STORE_USER_ALL | Send Byte | 0 | | N/A | Copy the entire contents of the running memory into non-volatile storage memory |

| | | | | | | |
|-----|--------------------------------|--------------------|---|---------|----------|--|
| 19h | CAPABILITY | Read Byte | 1 | A0h | | Communication capability query command Bit7: PEC verification 0– PEC is not supported 1– PEC is supported Bit6 to Bit5: indicates the maximum bus rate 00– Maximum bus speed,100KHz 01– Maximum bus speed,400KHz Bit4: Smbaler #: 0– The smbaler # alarm signal is not supported 1– Support Smbaler # alarm signal Bit3 to Bit0: reserved |
| 20h | VOUT_MODE | Read Byte | 1 | 17h | Linear16 | Output related data format definition 0x17: The data representing the output voltage is in Linear16 format, with Q=-9 data format |
| 21h | VOUT_COM MAND | Read/Write Byte | 2 | 24.0 | Linear16 | Set the output voltage to the LINEAR16 data format, Q=-9 The value ranges from 0 to 24 |
| 35h | VIN_ON | Read Byte | 2 | 70.0 | Linear11 | Input voltage Start value |
| 36h | VIN_OFF | Read Byte | 2 | 60.0 | Linear11 | Input voltage protection value |
| 3Ah | FAN_CONFI G_1_2 | Read Byte | 1 | 99h | | Fan configuration Bit7: Indicates whether Position1 has a fan 0 - No fan. 1 - No fan Bit6: Format of the fan speed control command 0 - duty cycle (default), 1 - RPM, Bit5 - 4: Speed is measured in pulses per second, bit4=1, bit5=0 Bit3: Indicates whether Position2 has a fan 0 - No fan. 1 - No fan Bit2: Format of the fan speed control command 0 - duty cycle (default), 1 - RPM, Bit1 - 0: The speed is measured in pulses per second |
| 3Bh | FAN_COMM AND_1 | Read/Write Word | 2 | 0 | Linear11 | Fan speed control command, percentage control, LINEAR11 data format The set speed is higher than the speed required by the power supply |
| 40h | VOUT_OV_F AULT_LIMIT | Read Byte | 2 | 34.0 | Linear16 | The output overvoltage protection point of the power module is Linear16 and Q=-9 |
| 41h | VOUT_OV_F AULT_RESPON SE | Read Byte | 1 | 0xB8 | | Output overvoltage protection response: 3.5s restart |
| 42h | VOUT_OV_W ARN_LIMIT | Read Byte | 2 | 32.0 | Linear16 | The value of the power module output overvoltage alarm is Linear16, with Q=-9 |
| 46h | IOUT_OC_FA ULT_LIMIT | Read Byte | 2 | 175.0 | Linear11 | Power module output overcurrent protection point |
| 47h | IOUT_OC_FA ULT_RESPON SE | Read Byte | 1 | 0xF8 | | Output overcurrent protection response: 3.5s restart |
| 4Fh | OT_FAULT_LI | Read Byte | 2 | 119.0°C | Linear11 | Power module overtemperature |

| | MIT | | | | | protection point |
|-----|------------------------|-----------------|---|---------|----------|---|
| 50h | OT_FAULT_RESPONSE | Read Byte | 1 | 0xC0 | | Power module overtemperature protection response: Restart the power module after overtemperature recovery |
| 51h | OT_WARN_LIMIT | Read Byte | 2 | 116.0°C | Linear11 | The power module overtemperature warning point is LINEAR11 data format |
| 68h | POUT_OP_FAULT_LIMIT | Read Byte | 2 | 3600.0 | Linear11 | Output overload protection point of the power module |
| 69h | POUT_OP_FAULT_RESPONSE | Read Byte | 1 | 0xF8 | | Output overload protection Response: 3.5s restart |
| 6Ah | POUT_OP_WARN_LIMIT | Read Byte | 2 | 3450.0 | Linear11 | Power module output overload alarm |
| 78h | STATUS_BYTE | Read Byte | 1 | 00h | | The low power status byte is mapped from status bytes such as STATUS_VOUT Bit7 reserved Bit6 OFF Bit5 VOUT_OV_FAULT Bit4 IOUT_OC_FAULT Bit3 reservation Bit2 TEMPERATURE Bit1 CML Bit0 reservation |
| 79h | STATUS_WORD | Read Word | 2 | 0000h | | Power status double bytes, mapped by status bytes such as STATUS_VOUT Low byte Bit7 reserved Bit6 OFF Bit5 VOUT_OV_FAULT Bit4 IOUT_OC_FAULT Bit3 reservation Bit2 TEMPERATURE Bit1 CML Bit0 reservation High byte Bit7 VOUT Bit6 IOUT/POUT Bit5 reservation Bit4 MFRSPECIFIC Bit3 POWER_GOOD# Bit2 FANS Bit1 reservation Bit0 reservation |
| 7Ah | STATUS_VOUT | Read/Write Byte | 1 | 00h | | The output voltage is related to the power supply. Write 1 Clear the alarm. If the fault persists, reset the power supply Bit7 VOUT_OV_FAULT Bit6 VOUT_OV_WARNING Bit5 reservation Bit4 reservation Bit3 reservation Bit2 reservation Bit1 reservation |
| 7Dh | STATUS_TEMP | Read/Write Byte | 1 | 00h | | If the status is related to the temperature of the power supply, write 1. Clear the alarm. If the fault persists, reset the power supply Bit7 OTP_FAULT Bit6 OTP_WARNING Bit5 reservation Bit4 reservation |

| | | | | | | |
|-----|---------------------|-----------------|-----|---------|----------|---|
| | | | | | | Bit3 reservation Bit2 reservation Bit1 reservation Bit0 reservation |
| 7Eh | STATUS_CML | Read/Write Byte | 1 | 00h | | If the status is related to the temperature of the power supply, write 1. Clear the alarm. If the fault persists, reset the power supply Bit7 OTP_FAULT Bit6 OTP_WARNING Communication, storage, or logic-related status Bit7 Invalid Or Unsupported Command Received Bit6 Invalid Or Unsupported Data Received Bit5 Packet Error Check Failed Bit4 reservation Bit3 reservation Bit2 reservation Bit1 reservation Bit0 reservation Bit5 reservation Bit4 reservation Bit3 reservation Bit2 reservation Bit1 reservation Bit0 reservation |
| 80h | STATUS_MFR_SPECIFIC | Read/Write Byte | 1 | | | The status is defined by the power supply manufacturer |
| 81h | STATUS_FANS_1_2 | Read/Write Byte | 1 | | | 1 Clear the alarm. If the fault persists, reset the fan module Bit7 Fan 1 Fault Bit6 Fan 2 Fault Bit5 reservation Bit4 reservation Bit3 reservation Bit2 reservation Bit1 reservation Bit0 reservation |
| 88h | READ_VIN | Read Word | 2 | | Linear11 | Input voltage value, LINEAR11 data format |
| 8Bh | READ_VOUT | Read Word | 2 | | Linear16 | Output voltage value, LINEAR16 data format, Q=-9 |
| 8Ch | READ_IOUT | Read Word | 2 | | Linear11 | Output current value, LINEAR11 data format |
| 8Dh | READ_TEMPERATURE_1 | Read Word | 2 | | Linear11 | Power side hot spot temperature, LINEAR11 data format |
| 90h | READ_FAN_SPEED_1 | Read Word | 2 | | Linear11 | Fan speed, unit: RPM, N=0, LINEAR11 data format |
| 91h | READ_FAN_SPEED_2 | Read Word | 2 | | Linear11 | Fan speed, unit: RPM, N=0, LINEAR11 data format |
| 96h | READ_POUT | Read Word | 2 | | Linear11 | Output power value, LINEAR11 data format |
| 98h | PMBUS_REVISION | Read Byte | 1 | 22h | | Indicates the PMBus version V1.2 |
| 99h | MFR_ID | Block Read | Var | MORNSUN | ASCII | Manufacturer code, ASCII character string, maximum 32 characters |
| 9Ah | MFR_MODEL | Block Read | Var | LMF3000 | ASCII | The value is an ASCII character string with a maximum of 32 characters |
| 9Bh | MFR_REVISION | Block Read | Var | 1.0 | ASCII | Product version number. The value is a string of up to 32 ASCII characters |

| | | | | | | |
|-----|--------------|------------|-----|------------|-------|--|
| 9Ch | MFR_LOCATION | Block Read | Var | WH | ASCII | The value is an ASCII character string with a maximum of 32 characters |
| 9Dh | MFR_DATE | Block Read | 10 | 2023-02-27 | ASCII | The value is an ASCII character string with a maximum of 32 characters |
| 9Eh | MFR_SERIAL | Block Read | Var | 123456789 | ASCII | Product serial number, ASCII string, maximum 32 characters |

For more details, please consult the MORNSUN FAE.