

IGBT MOSFET driver power supply



RoHS  
 US  
 UL62368-1  
 Report  
 EN62368-1

## FEATURES

- Reinforced insulation
- I/O isolation test voltage: 5000VAC
- Continuous barrier withstand voltage 1700V
- Characterised CMTI>200kV/μs
- Max. Capacitive Load: 2200μF
- Ultra-low isolation capacitance: 3.5pF (typ.)
- High efficiency up to 87%
- SIP package
- Operating ambient temperature range: -40°C to +105°C
- Continuous short-circuit protection

QAxx3-R3 is DC-DC module power supply designed for IGBT driver requiring two sets of isolation power supply. The mode of common ground outputs is adopted internally for better energy provision of IGBT turn-on and turn-off. Output short-circuit protection and self-recovery capabilities are also provided. General application includes:

1. Universal converter
2. AC servo drive system
3. Electric welding machine
4. Uninterruptible power supply (UPS)

## Selection Guide

Certification	Part No	Input		Output		Full Load Efficiency (%) Typ.	Max. Capacitive Load(μF)
		Voltage(VDC) (Range)	Current(mA, Typ.) Full Load/No Load	Voltage (VDC) +Vo/-Vo	Current (mA) +Io/-Io		
UL/EN	QA053-1509R3	5 (4.5-5.5)	382/62	+15.0/-8.7	+80/-40	78/82	1000
	QA123-1509R3	12 (10.8-13.2)	242/8	+15.0/-9.0	+100/-100	82/87	2200
	QAW123-1509R3	12 (9-15)	242/8				
	QA153-1509R3	15 (13.5-16.5)	195/8				
	QA243-1509R3	24 (21.6-26.4)	135/9				
-	QA053-1509R3G	5 (4.5-5.5)	383/33	+15.0/-8.7	+80/-40	77/81	1000
	QA123-1509R3G	12 (10.8-13.2)	231/16	+15.0/-9.0	+100/-100	82/87	2200
	QAW123-1509R3G	12 (9-15)	231/16				1000
	QA153-1509R3G	15 (13.5-16.5)	189/16				2200
	QA243-1509R3G	24 (21.6-26.4)	123/13				77/82

Note:\*The specified maximum capacitive load for positive and negative output is identical.

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage (1sec. max.)	Vin=5VDC	DC	-0.7	--	9	VDC
	Vin=12VDC	DC	-0.7	--	18	
	Vin=15VDC	DC	-0.7	--	21	
	Vin=24VDC	DC	-0.7	--	30	

Input Filter		Capacitance Filter
Hot Plug		Unavailable

### Output Specifications

Item			Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage	QA053-1509R3	+Vo	Vin=5VDC, Pin6 & Pin7 +Io= +80mA	14.55	15.3	16.05	VDC
		-Vo	Vin=5VDC, Pin5 & Pin6 -Io= -40mA	-8.32	-8.76	-9.20	
	QA123-1509R3	+Vo	Vin=12VDC, Pin6 & Pin7 +Io= +100mA	13.50	14.25	15.00	
		-Vo	Vin=12VDC, Pin5 & Pin6 -Io= -100mA	-7.92	-8.37	-8.82	
	QAW123-1509R3	+Vo	Vin=12VDC, Pin6 & Pin7 +Io= +100mA	13.50	14.25	15.00	
		-Vo	Vin=12VDC, Pin5 & Pin6 -Io= -100mA	-7.92	-8.37	-8.82	
	QA153-1509R3	+Vo	Vin=15VDC, Pin6 & Pin7 +Io= +100mA	14.25	15.00	15.75	
		-Vo	Vin=15VDC, Pin5 & Pin6 -Io= -100mA	-7.92	-8.37	-8.82	
	QA243-1509R3	+Vo	Vin=24VDC, Pin6 & Pin7 +Io= +100mA	14.55	15.30	16.05	
		-Vo	Vin=24VDC, Pin5 & Pin6 -Io= -100mA	-8.37	-8.82	-9.27	
	QA053-1509R3G	+Vo	Vin=5VDC, Pin6 & Pin7 +Io= +80mA	14.40	15.15	15.90	
		-Vo	Vin=5VDC, Pin5 & Pin6 -Io= -40mA	-8.18	-8.61	-9.05	
	QA123-1509R3G	+Vo	Vin=12VDC, Pin6 & Pin7 +Io= +100mA	13.88	14.63	15.38	
		-Vo	Vin=12VDC, Pin5 & Pin6 -Io= -100mA	-8.64	-9.09	-9.54	
	QAW123-1509R3G	+Vo	Vin=12VDC, Pin6 & Pin7 +Io= +100mA	13.88	14.63	15.38	
		-Vo	Vin=12VDC, Pin5 & Pin6 -Io= -100mA	-8.64	-9.09	-9.54	
	QA153-1509R3G	+Vo	Vin=15VDC, Pin6 & Pin7 +Io= +100mA	14.10	14.85	15.60	
		-Vo	Vin=15VDC, Pin5 & Pin6 -Io= -100mA	-8.64	-9.09	-9.54	
	QA243-1509R3G	+Vo	Vin=24VDC, Pin6 & Pin7 +Io= +100mA	14.25	15.00	15.75	
		-Vo	Vin=24VDC, Pin5 & Pin6 -Io= -100mA	-8.28	-8.73	-9.18	
Voltage Accuracy			10% - 100% load	See output regulation curve (Fig. 2- Fig. 17)			
Linear Regulation	5V Input model	Full voltage input range	+Vo Output	--	±1.1	±1.4	--
			-Vo Output	--	±1.1	±1.4	
	Other model		+Vo Output	--	±1.1	±1.5	
			-Vo Output	--	±1.1	±1.5	
Load Regulation	5V Input model	10% - 100% load	+Vo Output	--	8	15	%
			-Vo Output	--	10	15	
	QA (W) 123-1509R3		+Vo Output	--	11	17	
			-Vo Output	--	13	17	
	Other model		+Vo Output	--	6	15	
			-Vo Output	--	8	15	
Temperature Coefficient			Full load	--	±0.04	±0.1	%/°C
Ripple & Noise*	5V Input model	20MHz bandwidth	--	50	150	mVp-p	
	Other Input model		--	50	100		
Short-circuit Protection			Continuous, self-recovery				

Note:\* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation	Input-output, Test for 1 minute with a leakage current of 1mA max	5000	--	--	VAC	
Continuous barrier withstand voltage	Input- output (According to 61800-5-1)	1700	--	--	V	
CMTI	Input- output	±200	--	--	kV/μs	
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ	
Isolation capacitor	Input- output, capacitor at 100kHz/0.1V	(QAxx3-R3G) 5V Input model	--	5	6.5	pF
		Other model	--	3.5	5	
Operating Temperature	Derating when operating temperature ≥ 85°C, (see Fig. 1)	-40	--	105	°C	
Storage Temperature		-55	--	125		
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10s seconds	--	--	300		
Case Temperature Rise	Ta=25°C, nominal input voltage, full load	--	30	60		
Storage Humidity	Non-condensing	5	--	95	%RH	
Switching Frequency	Full load, nominal input voltage	--	200	--	kHz	
Safety Standard	See Selection Guide	UL62368-1 & EN62368-1 (Report)				
Safety Class		CLASS III				
MTBF	MIL-HDBK-217F@25°C	3500	--	--	k hours	

### Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant
Dimensions	19.50 x 9.80 x 12.50mm
Weight	4.3g(Typ.)
Cooling Method	Free air convection

### Electromagnetic Compatibility (EMC)

Emissions	CE	5V Input model	CISPR32/EN55032	CLASS B (see Fig.25 for recommended circuit)
		Other Input model	CISPR32/EN55032	CLASS A (see Fig.25 for recommended circuit)
	RE	5V Input model	CISPR32/EN55032	CLASS A (see Fig.25 for recommended circuit)
		Other Input model	CISPR32/EN55032	CLASS B (see Fig.26 for recommended circuit)
Immunity	ESD	5V Input model	IEC/EN61000-4-2	Contact ±6kV perf. Criteria B
		Other Input model	IEC/EN61000-4-2	Contact ±8kV perf. Criteria B

### Typical Characteristic Curves

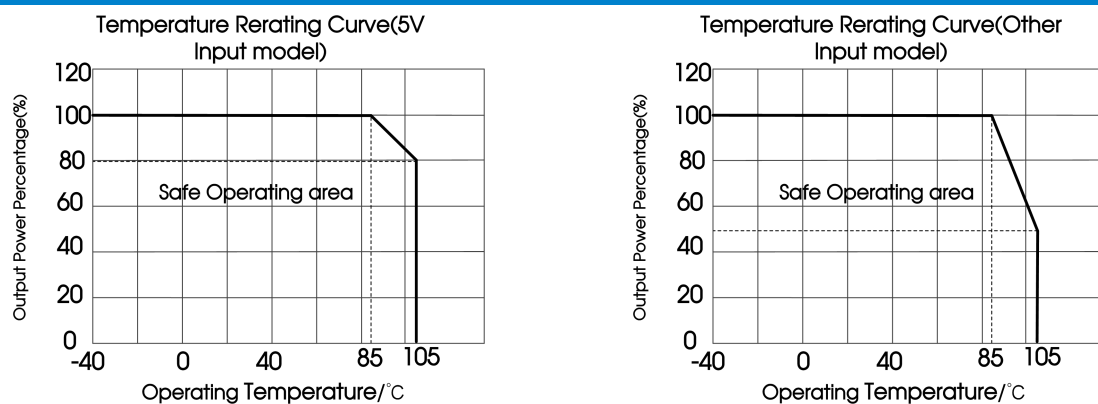


Fig. 1

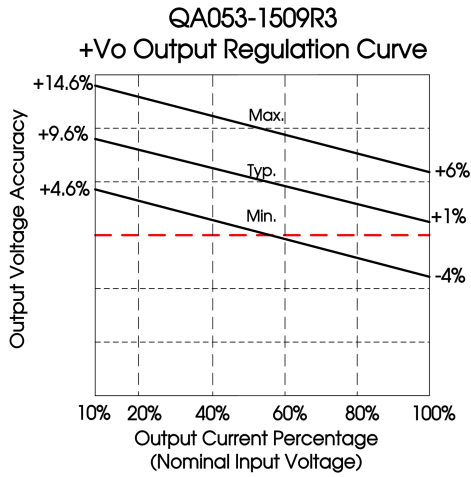


Fig. 2

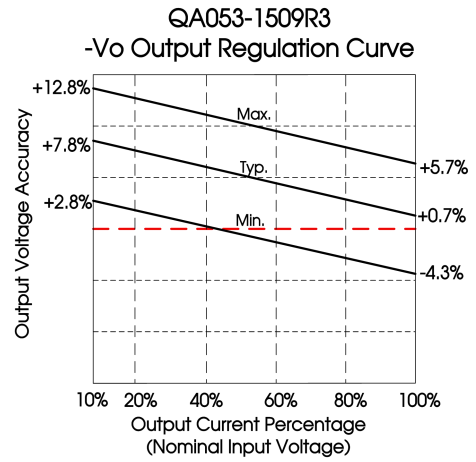


Fig. 3

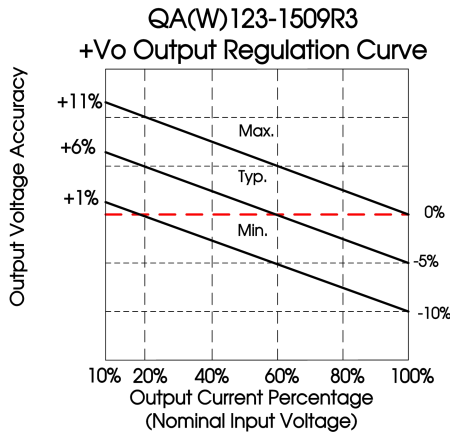


Fig. 4

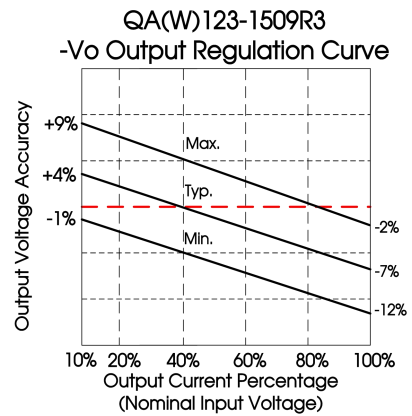


Fig. 5

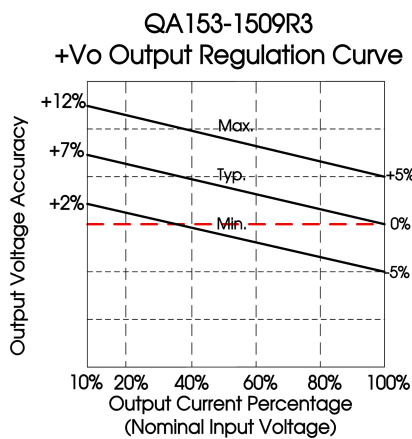


Fig. 6

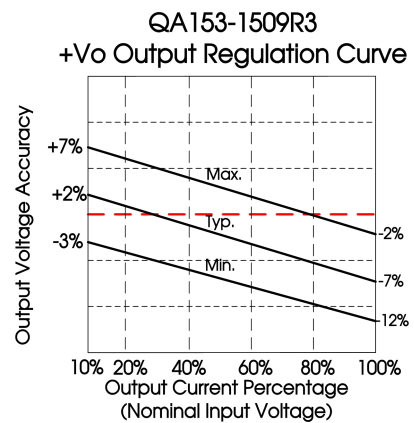


Fig. 7

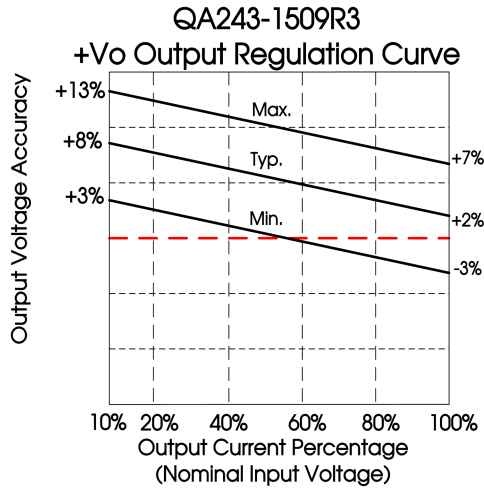


Fig. 8

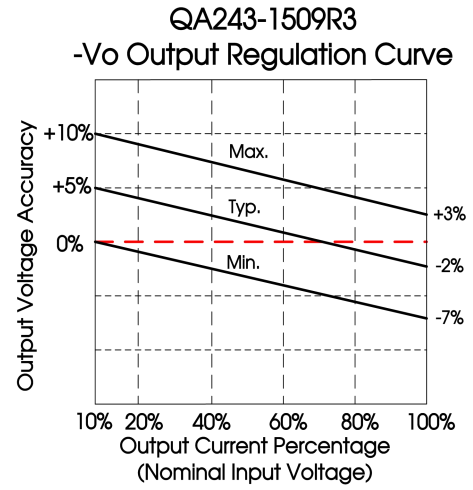


Fig. 9

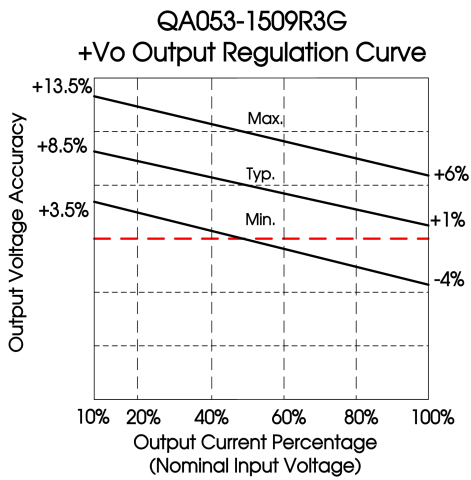


Fig. 10

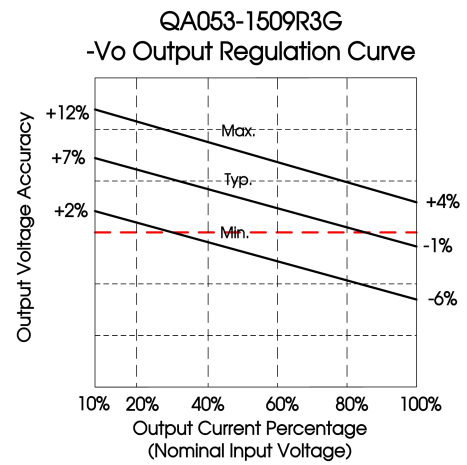


Fig. 11

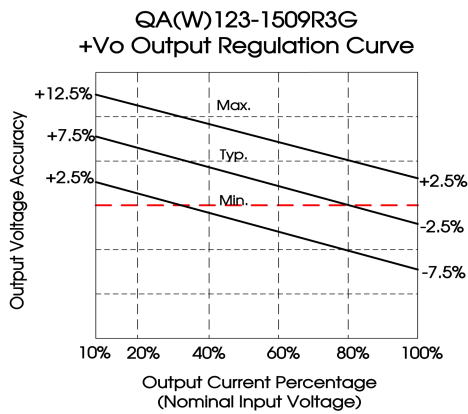


Fig. 12

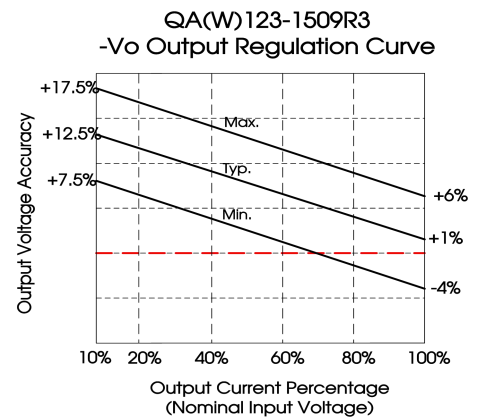


Fig. 13

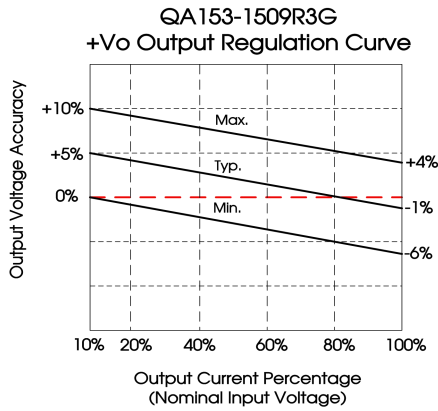


Fig. 14

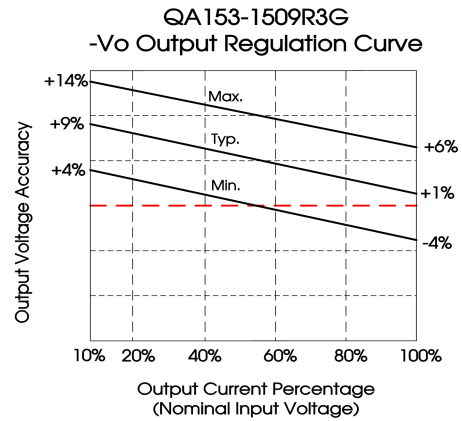


Fig. 15

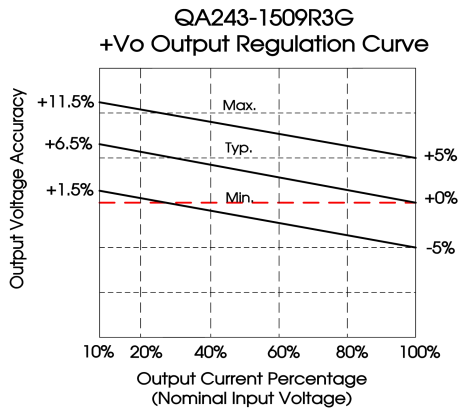


Fig. 16

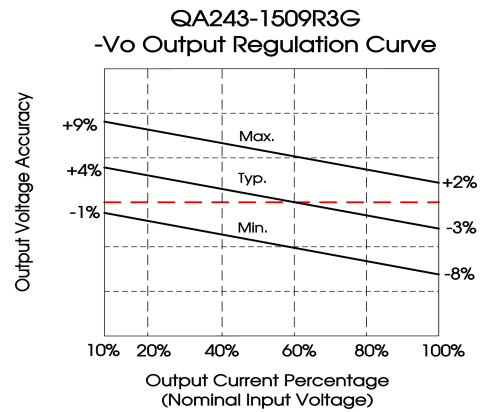


Fig. 17

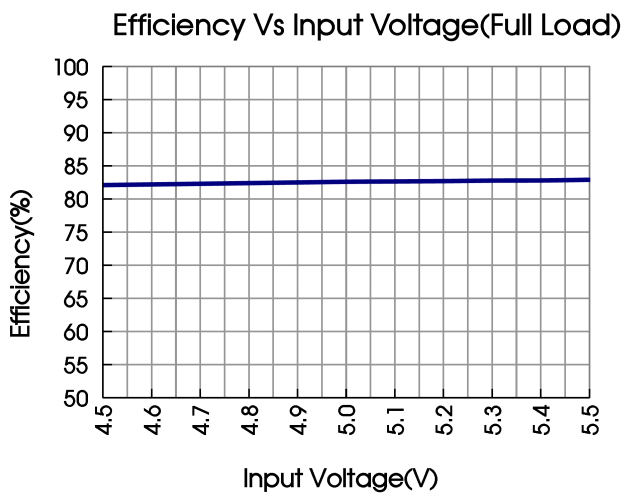


Fig. 18

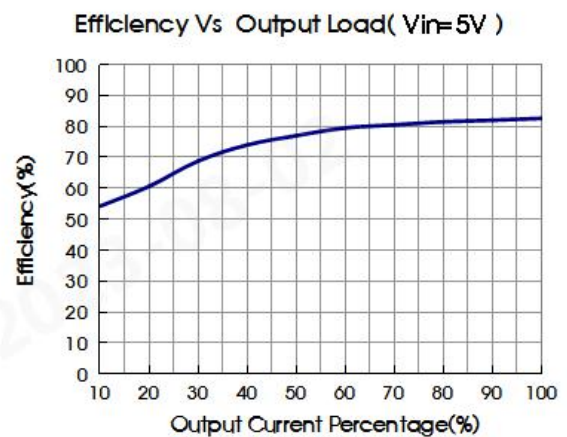


Fig. 19

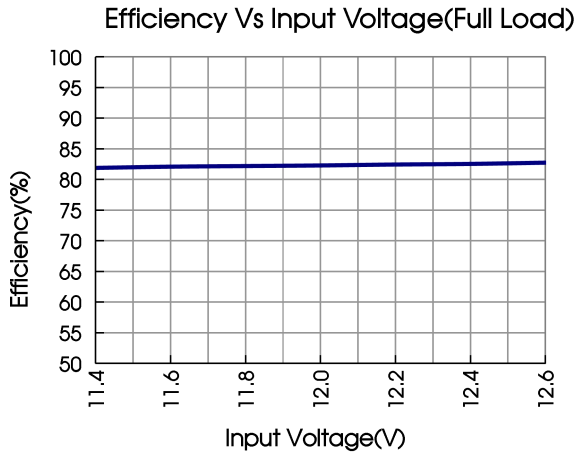


Fig. 20

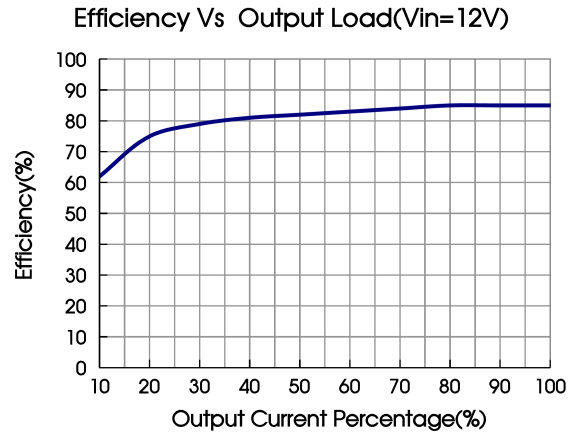


Fig. 21

Note: Take QA053-1509R3 and QA123-1509R3 as an example, other models can be corresponding reference

Design Reference

1. Test configurations

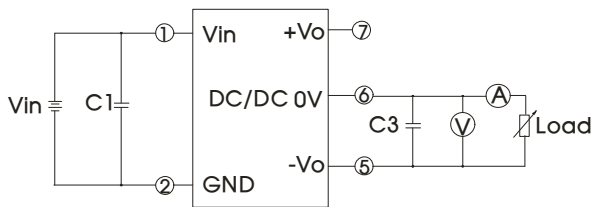


Fig. 22

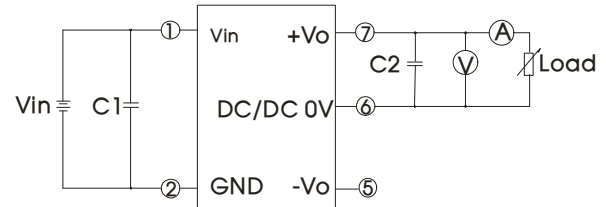


Fig. 23

Note: C1, C2, C3: 100µF/35V(low resitors)

2. Typical application

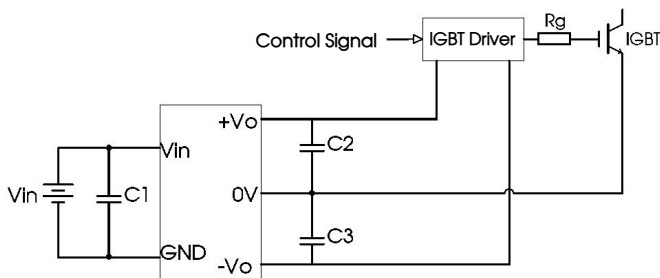


Fig. 24

C1/C2/C3
100µF/35V(Low internal resistance)

3. EMC typical recommended circuit (CLASS A)

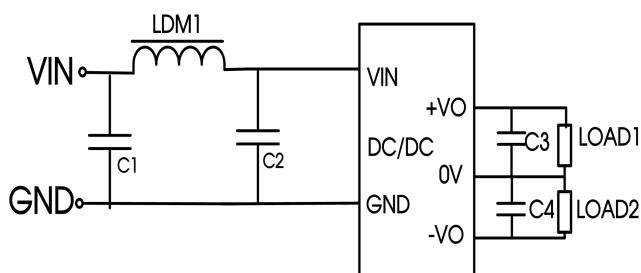


Fig. 25

Device selection			
Project		5V Input model	Other Input model
EMI	C1/C2	4.7µF /16V	1µF/50V
	C3/C4	10µF /50V (Low internal resistance)	100µF/30V (Low internal resistance)
	LDM	6.8µH	33µH

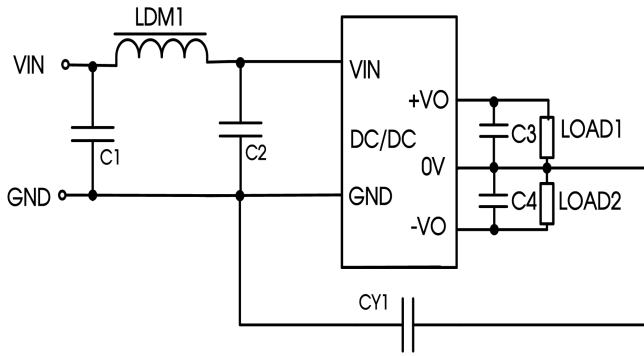




Fig. 26

Device selection		
EMI	C1/C2	4.7μF /16V
	C3/C4	10μF /50V(Low internal resistance)
	LDM	6.8μH
	CY1	330pF


4. Electrolytic capacitors are recommended for external capacitors at the input or output of the product. Tantalum capacitors are not, otherwise there is a risk of failure.
5. The products do not support parallel connection of their output for power expansion purpose or hot-plug.
6. For more information please find the application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

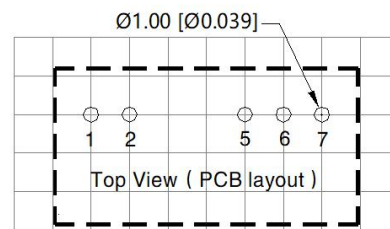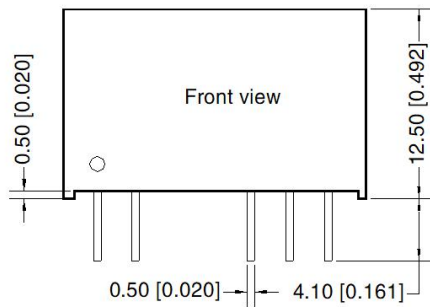

Note: Grid 2.54\*2.54mm

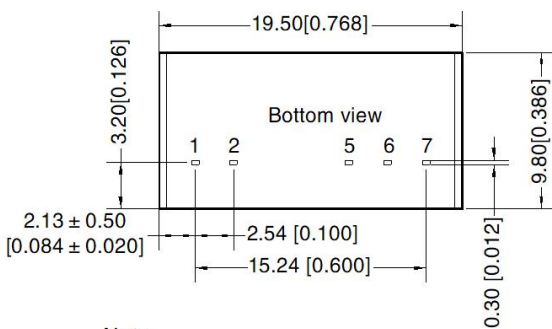

Note:  
Unit: mm[inch]  
Pin section tolerances: ±0.10[±0.004]  
General tolerances: ±0.50[±0.020]

Pin-Out	
Pin	Mark
1	Vin
2	GND
5	-Vo
6	0V
7	+Vo



Notes:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58200013;
2. The lead connecting the power supply module and IGBT driver should be as short as possible during use;
3. The output filtering capacitor should be as close as possible to the power supply module and IGBT driver;
4. The peak of the IGBT driver gate drive current is high, so low internal resistance electrolytic capacitor is recommended to be used for the power supply module output filter capacitor;
5. The average output power of the driver must be lower than that of the power supply module;
6. Consider fixing with glue near the module if being used in vibration occasion;
7. The maximum capacitive load offered were tested at nominal input voltage and full load;
8. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
9. All index testing methods in this datasheet are based on company corporate standards;
10. The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
11. Products are related to laws and regulations: see "Features" and "EMC".
12. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units
13. We can provide product customization service, please contact our technicians directly for specific information.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)