

HXE-200 SERIES



FEATURES

- AC Input range selectable by switch
- High operating temperature up to 70 °C
- Protection: Short Circuit/Overload/ Over Voltage/ Over Temperature
- Cooling by free air convection
- Higher efficiency
- 4 years warranty

IS 13252 (Part 1) 2010/
 IEC 60950-1:2005

 R-62006220
www.bis.gov.in



HXE200 series are designed with lower pole housing and for wide range AC input from 115VAC / 230VAC (selectable by switch). In addition to the high efficiency, Delivering an extremely low no load power consumption. The design of metallic mesh case enhances the heat dissipation. The good performance can be used for industrial automation & control systems, varied equipments etc.

SELECTION GUIDE

| Product model | DC Voltage | Rated Current | Rated Power | Max. Capacitive Load (μF) |
|---------------|------------|---------------|-------------|---------------------------|
| HXE-200-05 | 5V | 40A | 200W | 10000uF |
| HXE-200-12 | 12V | 17A | 204W | 4000uF |
| HXE-200-15 | 15V | 14A | 210W | 3300uF |
| HXE-200-24 | 24V | 8.8A | 211.4W | 1500uF |
| HXE-200-36 | 36V | 5.9A | 212.4W | 1500uF |
| HXE-200-48 | 48V | 4.4A | 211.2W | 470uF |

INPUT CHARACTERISTICS

| Parameter | Units | Model |
|--------------------------------|---|------------|
| RATED INPUT VOLTAGE | 100-240VAC/170 ~240VAC by switch | |
| OPERATING VOLTAGE RANGE | 90~132VAC/180 ~264VAC by switch | |
| | 240~370VDC (Switch on 230VAC) | |
| FREQUENCY RANGE | 47/63Hz | |
| AVERAGE EFFICIENCY(115/230VAC) | 87% | HXE-200-05 |
| | 87.5% | HXE-200-12 |
| | 88% | HXE-200-15 |
| | 89.5% | HXE-200-24 |
| | 89.5% | HXE-200-36 |
| | 90% | HXE-200-48 |
| AC CURRENT(Typ.) | 4A/115VAC | |
| | 2.2A/230VAC | |
| INRUSH CURRENT(Typ.) | COLD START 60A/115VAC, COLD START 60A/230VAC | |
| LEAKAGE CURRENT | <2mA/240VAC | |

OUTPUT CHARACTERISTICS

| Parameter | Units | Model |
|---------------------|----------|------------|
| RIPPLE & NOSE(max.) | 150mVp-p | HXE-200-05 |
| | 150mVp-p | HXE-200-12 |
| | 150mVp-p | HXE-200-15 |
| | 150mVp-p | HXE-200-24 |
| | 200mVp-p | HXE-200-36 |
| | 200mVp-p | HXE-200-48 |

| Parameter | Units | Model |
|---------------------|----------------------------|------------|
| VOLTAGE TOLERANCE | ±3.0% | HXE-200-05 |
| | ±1.5% | HXE-200-12 |
| | ±1.0% | HXE-200-15 |
| | ±1.0% | HXE-200-24 |
| | ±1.0% | HXE-200-36 |
| | ±1.0% | HXE-200-48 |
| LINE REGULATION | ±0.5% | |
| LOAD REGULATION | ±2.0% | HXE-200-05 |
| | ±1.0% | HXE-200-12 |
| | ±0.5% | HXE-200-15 |
| | ±0.5% | HXE-200-24 |
| | ±0.5% | HXE-200-36 |
| | ±0.5% | HXE-200-48 |
| SETUP TIME | 1500ms/230VAC at full load | |
| | 1500ms/115VAC at full load | |
| RISE TIME | 50ms/230VAC at full load | |
| | 50ms/115VAC at full load | |
| HOLD UP TIME (Typ.) | 16ms/230VAC at full load | |
| | 12ms/115VAC at full load | |

PROTECTION

| Parameter | Units |
|------------------|--|
| SHORT CIRCUIT | Protection type: Hiccup mode, recovers automatically after fault condition is removed |
| OVER LOAD | 110%-150% Rated Output Power |
| | Protection type: Hiccup mode, recovers automatically after fault condition is removed |
| OVER VOLTAGE | 5V:5.75~6.75V 12V:13.8~16.2V 15V:18.75~21.75V 24V:28.8~33.6V 36V:41.4~48.6V 48V:55.2~64.8V Protection type: Hiccup mode, recovers automatically after fault condition is removed |
| OVER TEMPERATURE | Protection type: Hiccup mode, recovers automatically after fault condition is removed |

ENVIRONMENT

| Parameter | Units |
|------------------------|---|
| WORKING TEMP | -30°C to +70 °C (Refer to "Derating Curve") |
| Working Humidity | 20~90% RH Non-Condensing |
| STORAGE TEMP, HUMIDITY | ~40°C~+85°C, 10~95% RH non-condensing |
| TEMP COEFFICIENT | ±0.03% /°C (0~50°C) |
| SAFETY PROTECTION | CLASS I |
| VIBRATION | 10~500Hz, 5G 10min./1 cycle, 60 min. each along X,Y,Z axes |
| OVER VOLTAGE CATEGORY | Class III; According to BS EN/EN61558, BS EN/EN50178, altitude up to 2000 meters |
| MTBF | 600K hrs min. MIL-HDBK-217F(25°C) |

SAFETY & EMC

| Parameter | Units |
|----------------------|---|
| SAFETY STANDARDS | BSEN/EN62368-1 |
| WITHSTAND VOLTAGE | I/P-O/P:4KVAC/min, I/P-PE:2KVAC/min, O/P-FG:1.25KVAC/min |
| ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC/25°C/70%RH |
| EMC EMISSION | Compliance to BSEN/EN55032(CISPR32) Class B, BSEN/EN61000-3-2,-3, Class A |
| EMC IMMUNITY | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,perf. CriteriaA BSEN/EN61000-4-11,perf.CriteriaA,BSEN/EN55035 |


NOTE

1. All parameters NOT specially mentioned are measured at 115/230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. Line regulation is measured from low line to highline at rated load.
5. Load regulation is measured from 0% to 100% rated load.
6. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.
7. The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m(6500ft).
8. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC. directives.
9. The out case needs to be connected to the earth, of system when the terminal equipment in operating

DIMENSION, WEIGHT & PACKING

| Parameter | Units |
|---------------------------|---------------------|
| SIZE: | 179*99*30mm (LxWxH) |
| WEIGHT: | 660g |
| CARTON SIZE: | 36×31.5×17.5CM |
| | 14.96×7.68×10.24in |
| MASTER CARTON QUANTITIES: | 15pcs/Carton |

DIMENSIONS AND INSTALLATION

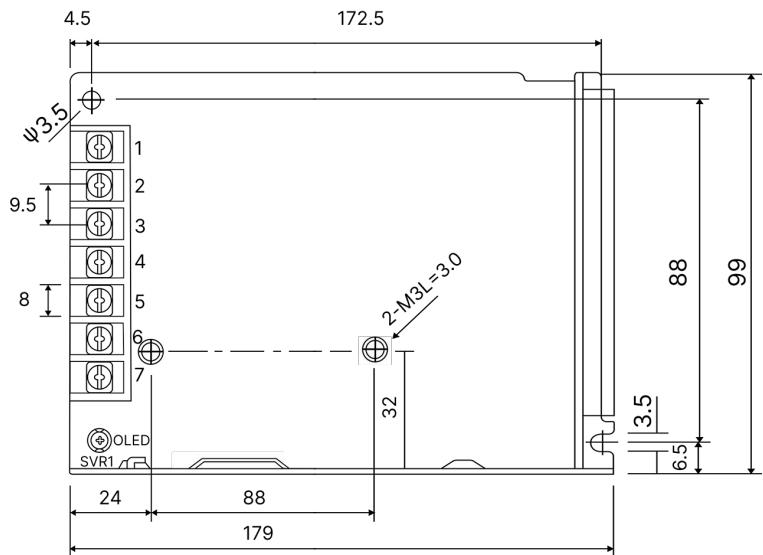


Input

| No. | Description |
|-----|-------------|
| 1 | AC/L |
| 2 | AC/N |
| 3 | FG \perp |

Output

| No. | Description |
|-----|-------------|
| 4,5 | DC OUTPUT-V |
| 6,7 | DC OUTPUT+V |


| Switch | AC Input | DC Input |
|--|------------|------------|
|  | 90-132VAC | ---- |
|  | 180-264VAC | 240-373VDC |

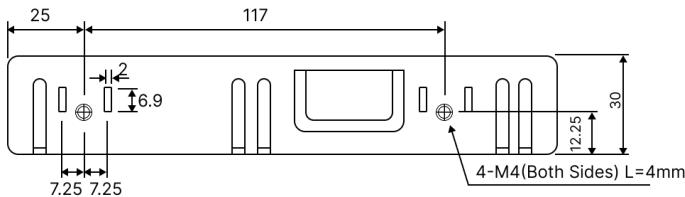


Note: Unit: mm[inc]
Wire range: 22-12AWG
Connector tightening torque: M3.5,0.8N·m
General tolerances:+1.00[+0.039]

The diagram illustrates a screw assembly. A screw, labeled 'Screw', is shown being driven into a component. The top part of the screw is labeled 'Customer System' and the bottom part is labeled 'Power Case'. A dimension line with an arrow indicates a length of L from the base of the screw to the top of the Power Case component.

BLOCK DIAGRAM

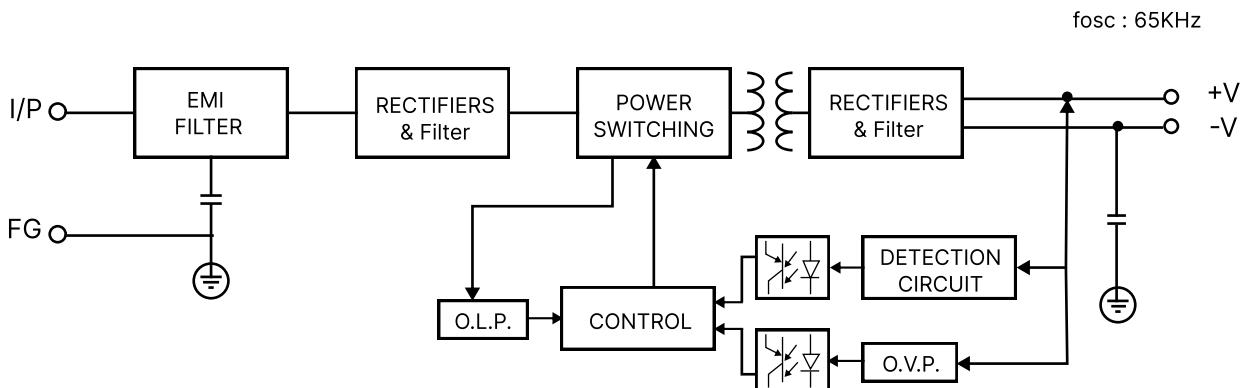

DERATING CURVE

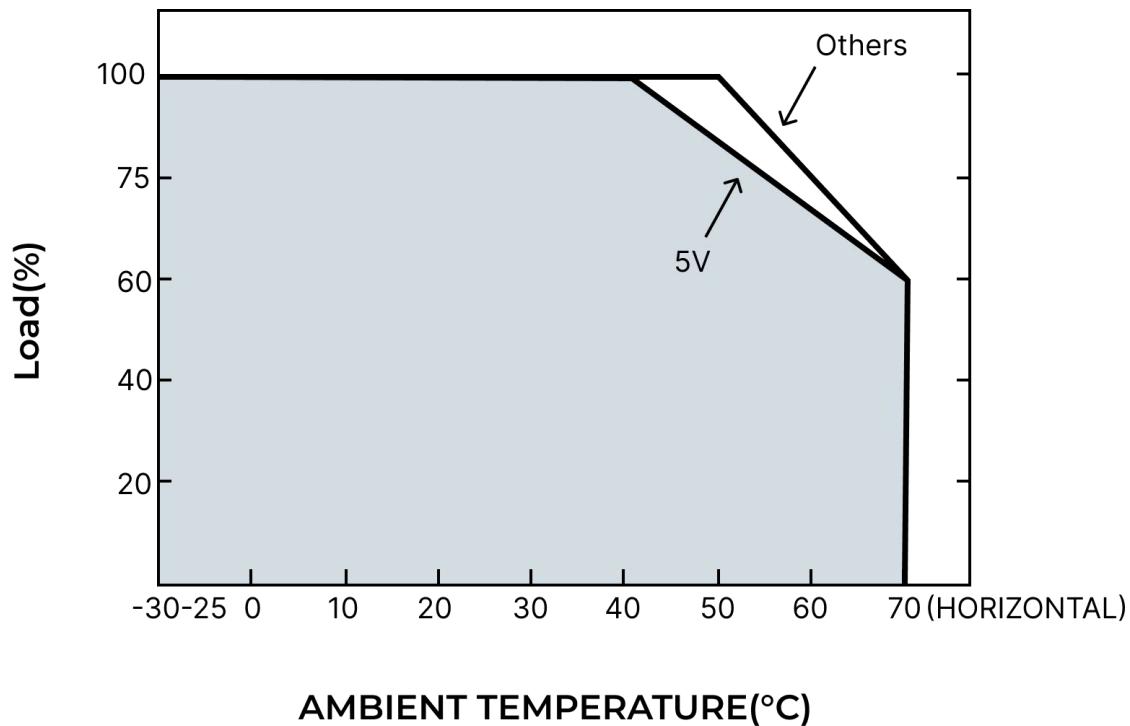

OUTPUT DERATING VS INPUT VOLTAGE CURVES

